US005749095A

United States Patent [19]

Hagersten

[11] Patent Number: 5,749,095

[45] Date of Patent: May 5, 1998

[54] **MULTIPROCESSING SYSTEM CONFIGURED TO PERFORM EFFICIENT WRITE OPERATIONS**

[75] Inventor: **Erik E. Hagersten**, Palo Alto, Calif.

[73] Assignee: **Sun Microsystems, Inc.**, Palo Alto, Calif.

[21] Appl. No.: **675,634**

[22] Filed: **Jul. 1, 1996**

[51] **Int. Cl.**[6] **G06F 12/08**; G06F 13/00

[52] **U.S. Cl.** **711/141**; 711/203; 711/3; 395/200.16; 395/200.02

[58] **Field of Search** 711/141–146, 121, 711/130, 3, 201, 203, 117, 206–210, 140; 395/200.01–200.09, 200.14

[56] **References Cited**

U.S. PATENT DOCUMENTS

5,222,224	6/1993	Flynn et al.	711/144
5,303,362	4/1994	Butts, Jr. et al.	711/121
5,603,005	2/1997	Bauman et al.	711/124
5,613,071	3/1997	Rankin et al.	395/610
5,655,096	8/1997	Branigin	395/376

OTHER PUBLICATIONS

Cox et al., "Adaptive Cache Coherency for Detecting Migratory Shared Data," Proc. 20th Annual Symposium on Computer Architecture, May 1993, pp. 98–108.

Stenström et al., "An Adaptive Cache Coherence Protocol Optimized for Migratory Sharing," Proc. 20th Annual Symposium on Computer Architecture, May 1993 IEEE, pp. 109–118.

Kourosh et al., "Two Techniques to Enhance the Performance of Memory Consistency Models," 1991 International Conference on Parallel Processing, pp. 1–10.

Li et al., "Memory Coherence in Shared Virtural Memory Systems," 1986 ACM, pp. 229–239.

D. Lenosky, PhD, "The Description and Analysis of DASH: A Scalable Directory–Based Multiprocessor," *DASH Prototype System*, Dec. 1991, pp. 36–56.

Hagersten et al., "Simple COMA," Ashley Saulsbury and Anders Landin Swedish Institute of Computer Science, Jul. 1993, pp. 233–259.

Primary Examiner—Matthew M. Kim

Attorney, Agent, or Firm—Conley, Rose & Tayon; B. Noel Kivlin

[57] **ABSTRACT**

A computer system defines a "fast write" protocol for performing certain write operations. Write operations include a particular encoding if they are to be performed using the fast write protocol. When the system interface within a node detects the particular encoding, the write operation is captured by the system interface. In addition, the data is transferred to the system interface from the processor performing the write operation. The data transfer is performed even if the node is not maintaining a coherency state for the affected coherency unit which is consistent with performing the write operation. Instead, the coherency activity employed to acquire the proper coherency state is initiated subsequent to or in parallel with the receipt of data from the processor. Because fast write operations are performed prior to acquiring write permission to the coherency unit, ordering with respect to other operations is not maintained. Therefore, the fast write protocol is not suitable for all write operations within the computer system. However, the protocol may be used to increase performance. For example, a group of writes enveloped by software synchronization operations appear to be ordered as a group with respect to operations outside of the synchronization. The performance gained by executing the group of writes using the fast write protocol may outweigh the system bandwidth and extra latency used to perform synchronization.

20 Claims, 19 Drawing Sheets

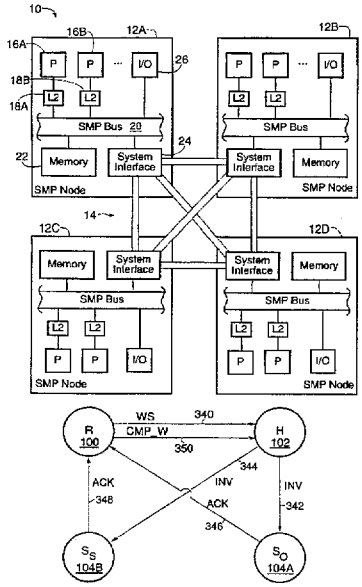

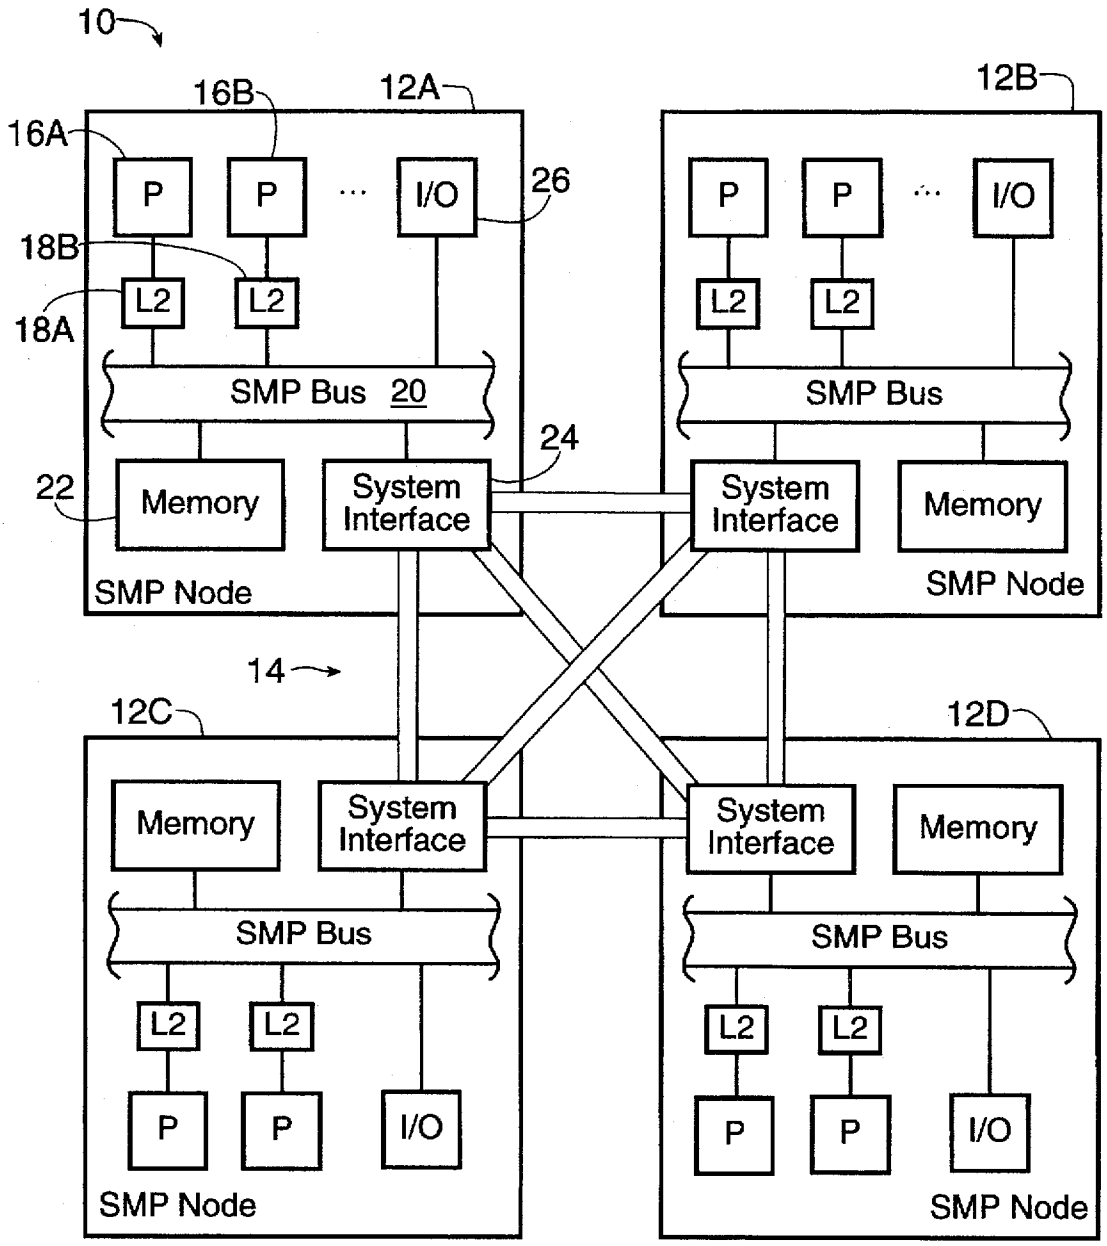
10
16B
12A
12B
16A
P
P
I/O
26
18B
L2
L2
18A
SMP Bus 20
SMP Bus
24
22
Memory
System Interface
System Interface
Memory
SMP Node
SMP Node
14
12C
12D
Memory
System Interface
System Interface
Memory
SMP Bus
SMP Bus
L2
L2
P
P
I/O
SMP Node
SMP Node

Fig. 1

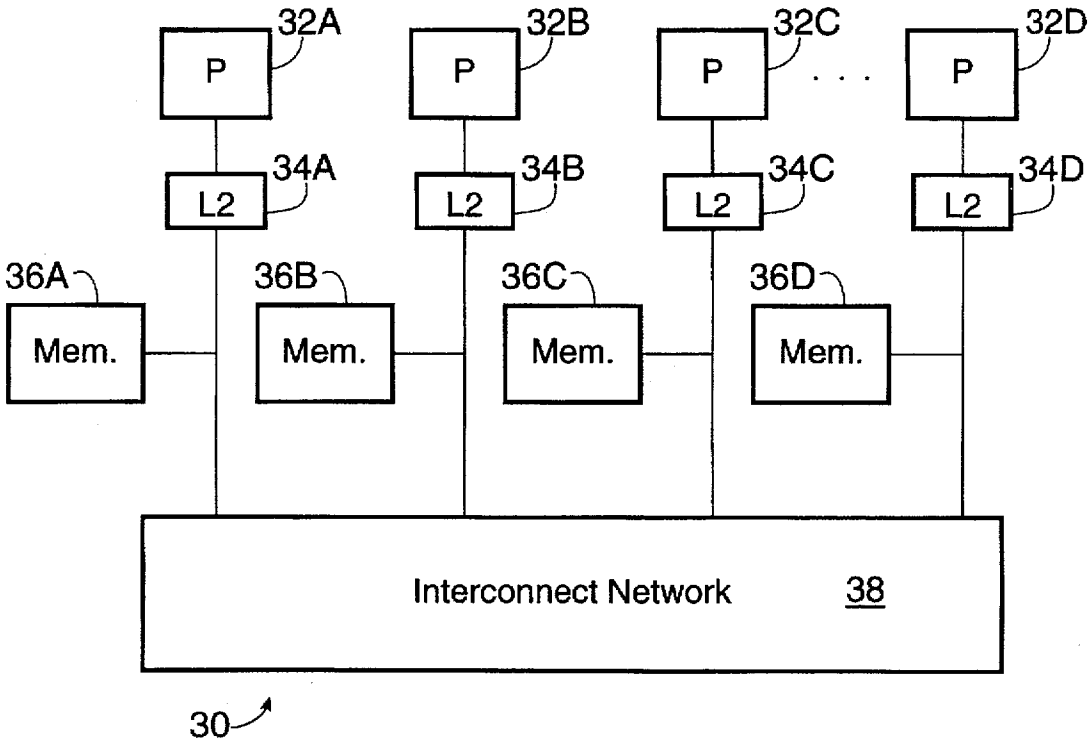
32A
32B
32C
32D
P
P
P
P
34A
34B
34C
34D
L2
L2
L2
L2
36A
36B
36C
36D
Mem.
Mem.
Mem.
Mem.
Interconnect Network 38
30

Fig. 1A

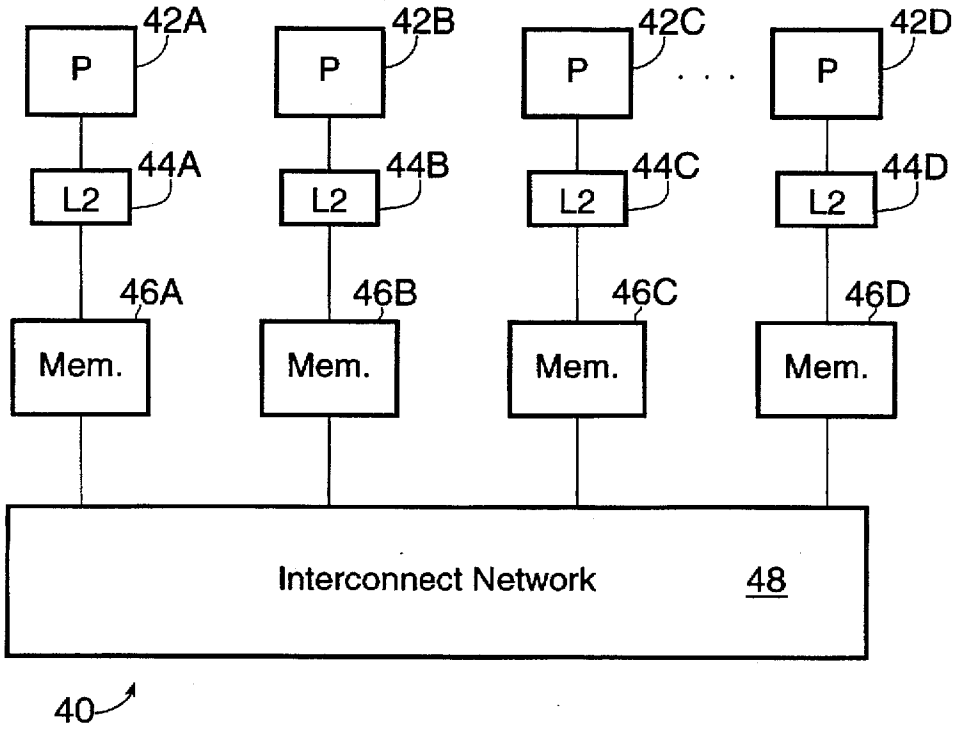
42A
42B
42C
42D
P
P
P
P
44A
44B
44C
44D
L2
L2
L2
L2
46A
46B
46C
46D
Mem.
Mem.
Mem.
Mem.
Interconnect Network 48
40

Fig. 1B

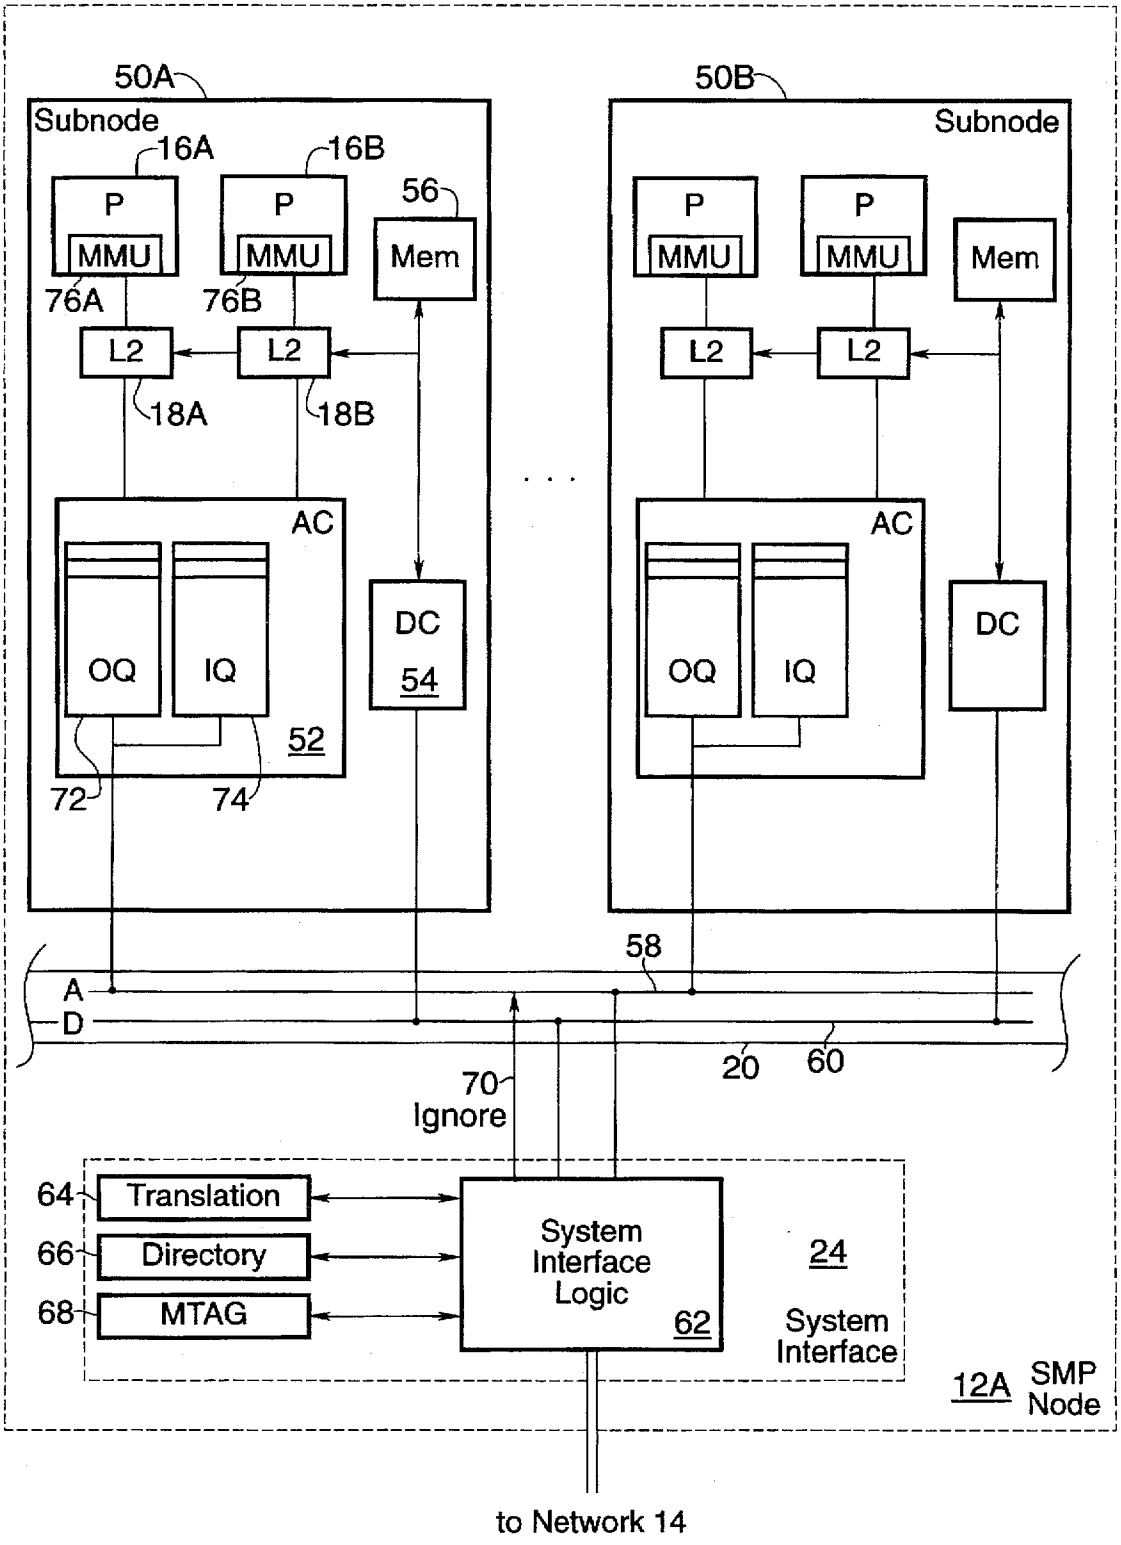
50A
Subnode
16A
16B
P
MMU
P
MMU
56
Mem
76A
76B
L2
L2
18A
18B
AC
OQ
IQ
52
72
74
DC
54
50B
Subnode
P
MMU
P
MMU
Mem
L2
L2
AC
OQ
IQ
DC
58
A
D
20
60
70
Ignore
64
Translation
66
Directory
68
MTAG
System
Interface
Logic
62
24
System
Interface
12A
SMP
Node
to Network 14

Fig. 2

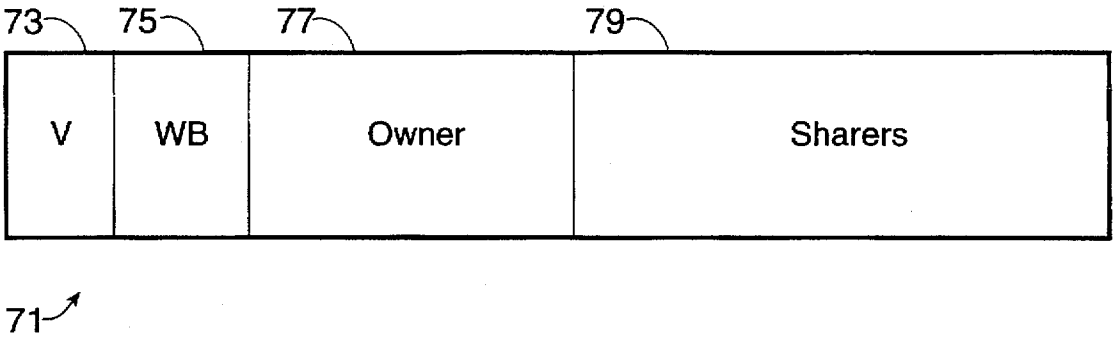

Fig. 2A

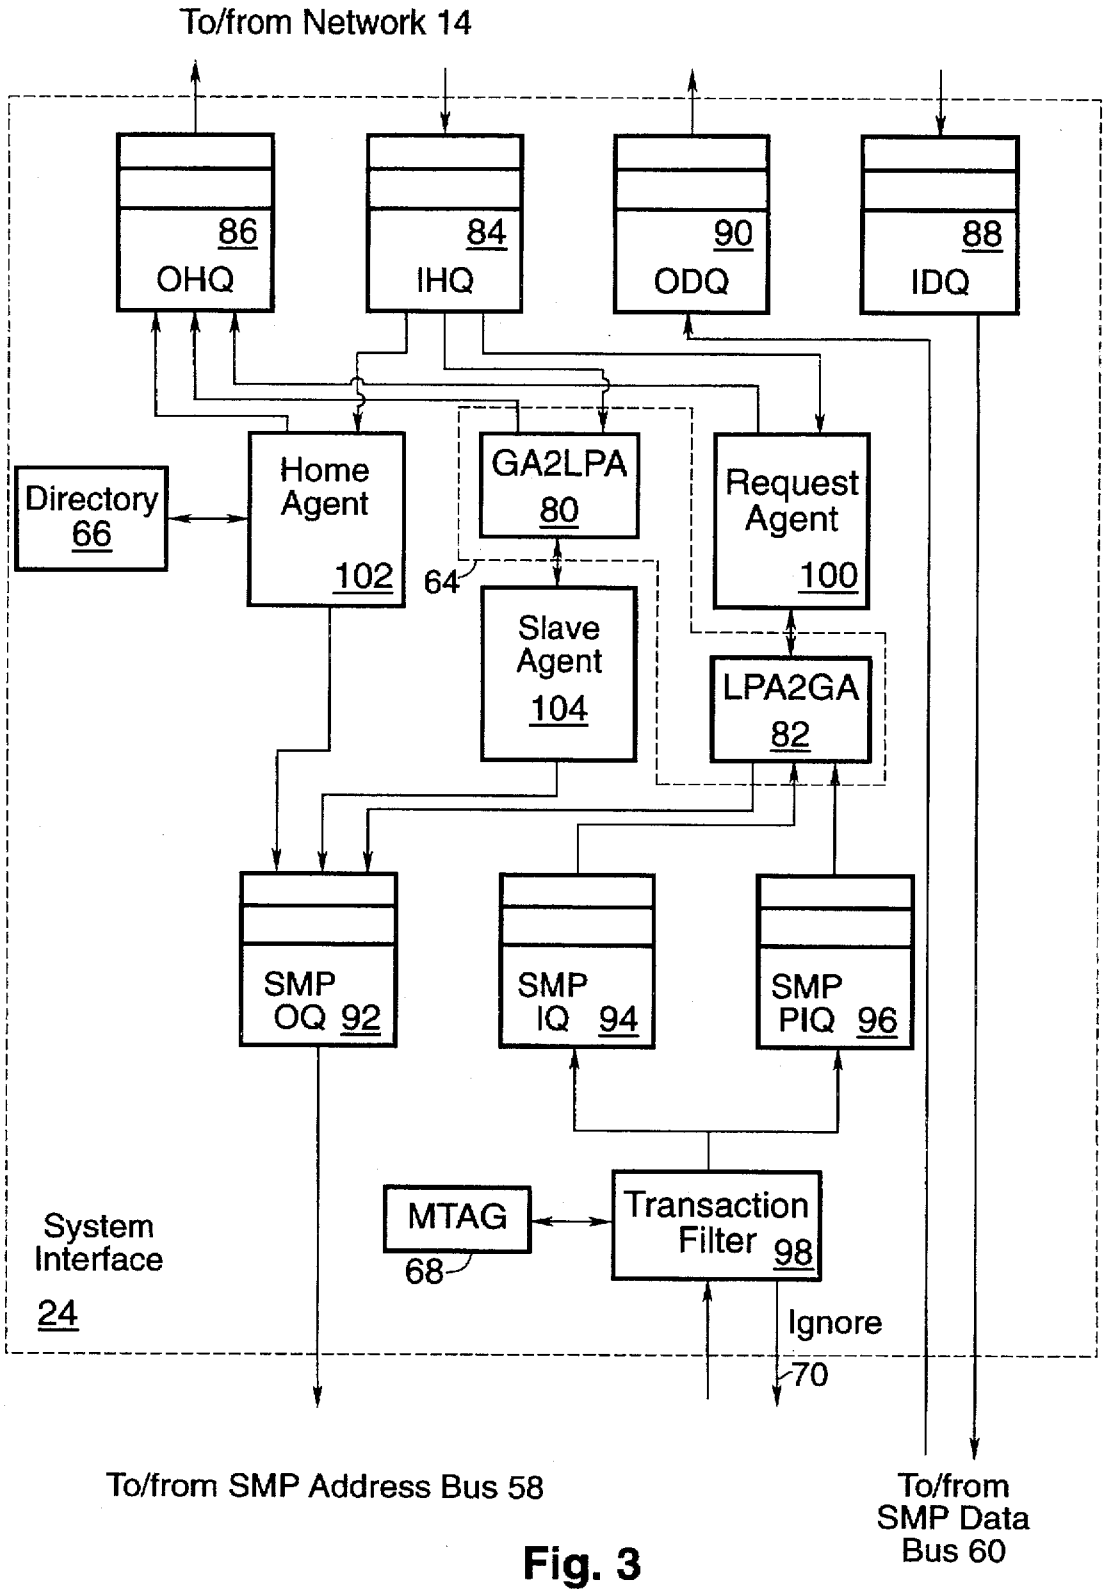
To/from Network 14
86
OHQ
84
IHQ
90
ODQ
88
IDQ
Directory
66
Home
Agent
102
GA2LPA
80
64
Request
Agent
100
Slave
Agent
104
LPA2GA
82
SMP
OQ 92
SMP
IQ 94
SMP
PIQ 96
MTAG
68
Transaction
Filter 98
System
Interface
24
Ignore
70
To/from SMP Address Bus 58
To/from
SMP Data
Bus 60

Fig. 3

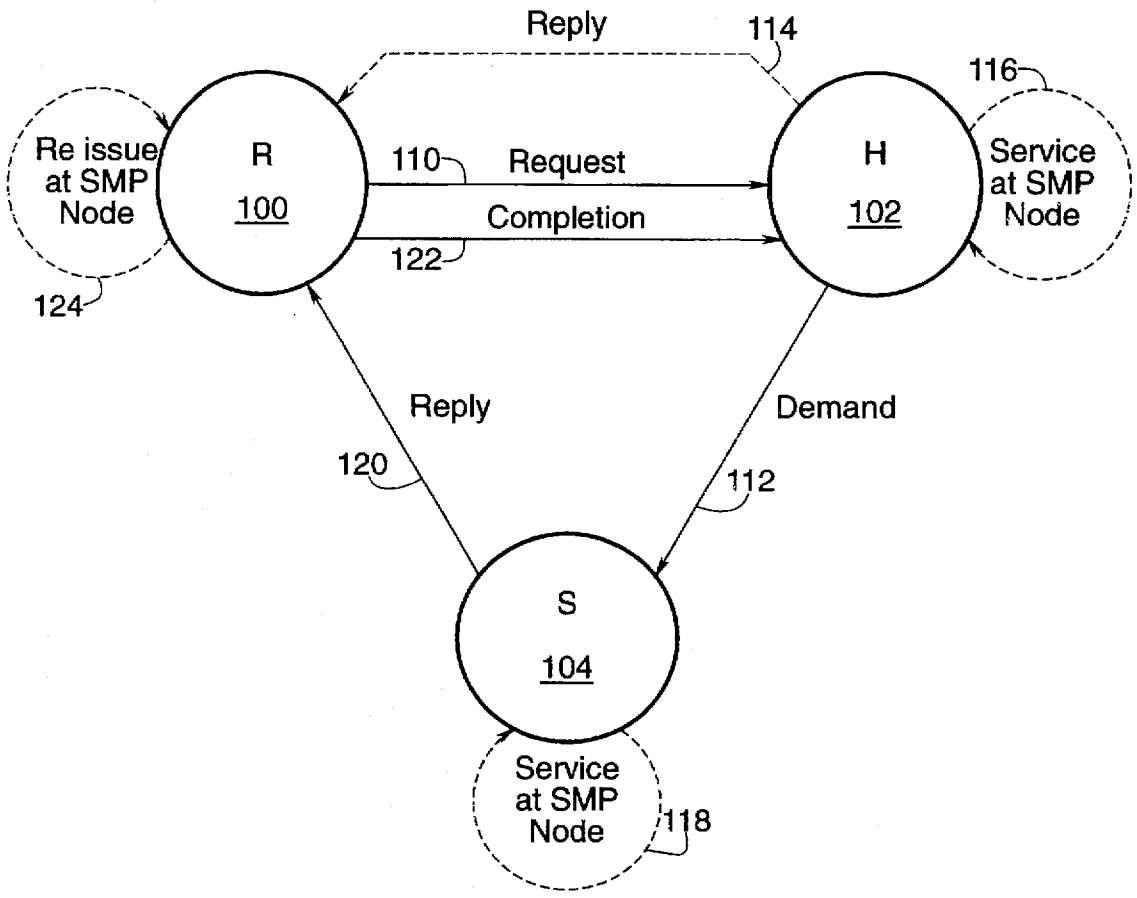
Reply
114
116
Re issue at SMP Node
R
100
110
Request
Completion
122
H
102
Service at SMP Node
124
Reply
120
Demand
112
S
104
Service at SMP Node
118

Fig.4

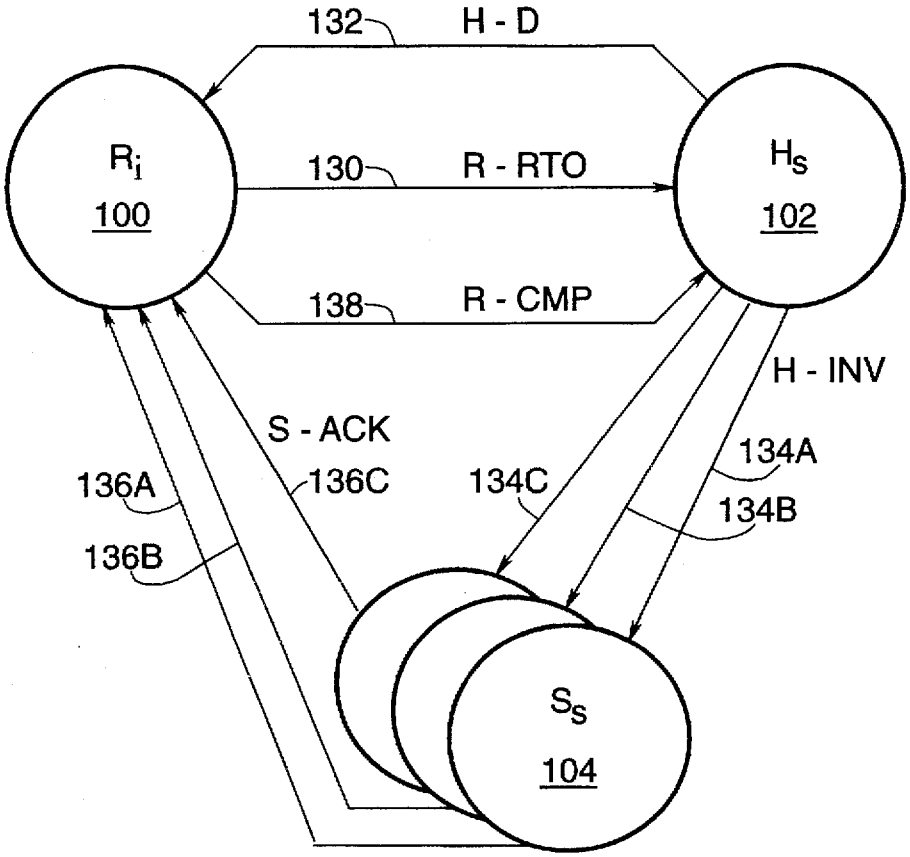
132
H - D
R_i
100
130
R - RTO
H_s
102
138
R - CMP
H - INV
S - ACK
136C
134C
134A
134B
136A
136B
S_s
104

Fig. 5

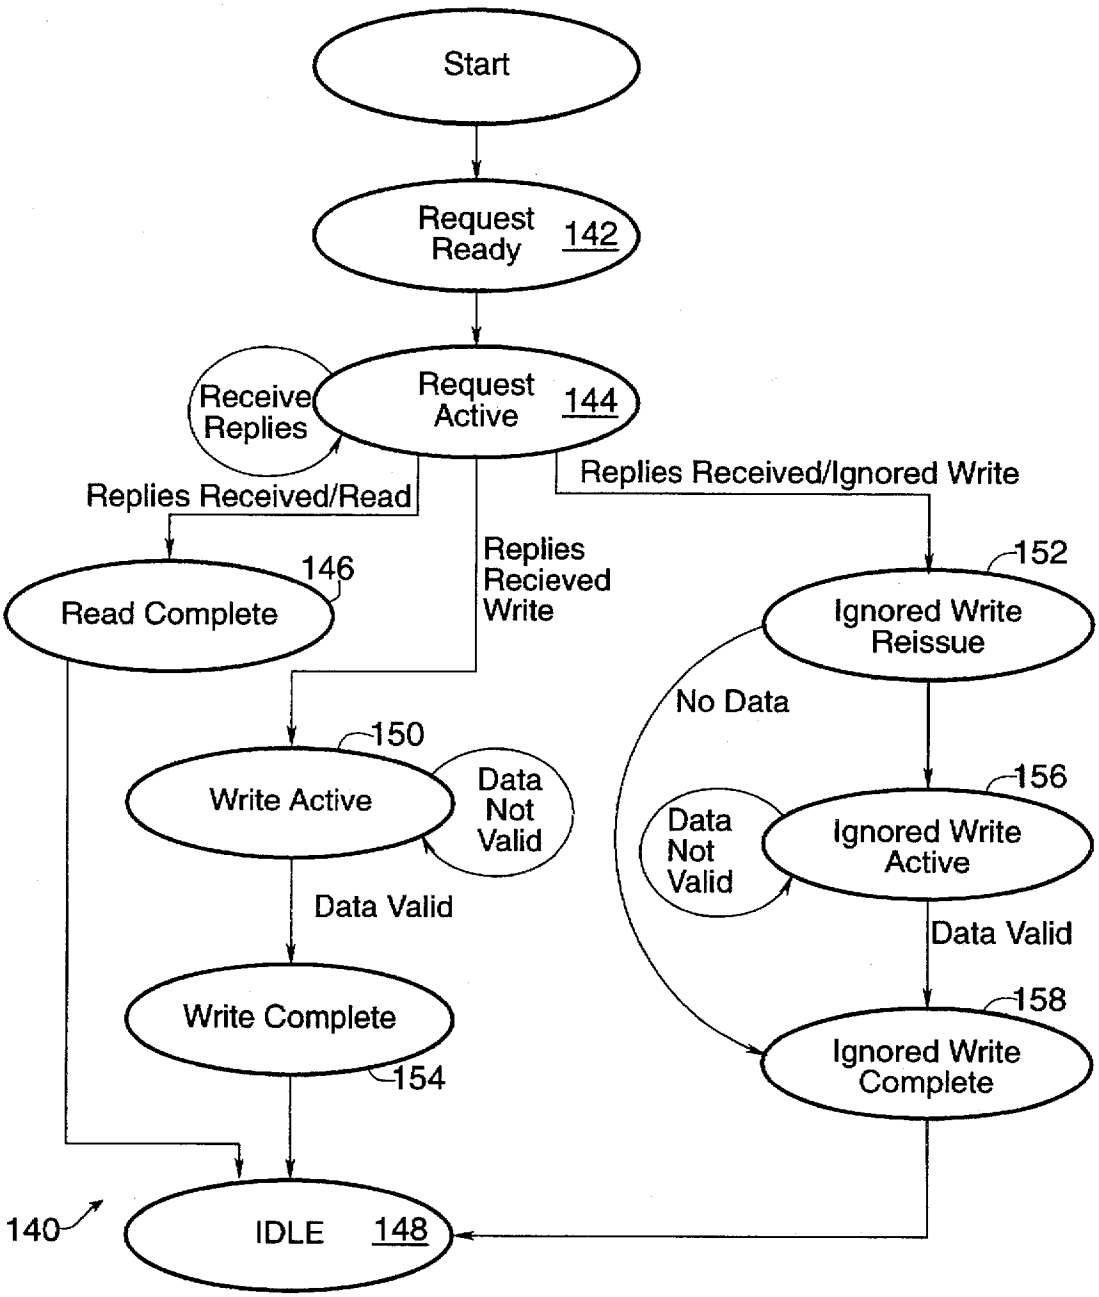
Start
Request Ready 142
Receive Replies
Request Active 144
Replies Received/Read
Replies Received/Ignored Write
Replies Recieved Write
146
Read Complete
152
Ignored Write Reissue
No Data
150
Write Active
Data Not Valid
156
Data Not Valid
Ignored Write Active
Data Valid
Data Valid
Write Complete
154
158
Ignored Write Complete
140
IDLE 148

Fig. 6

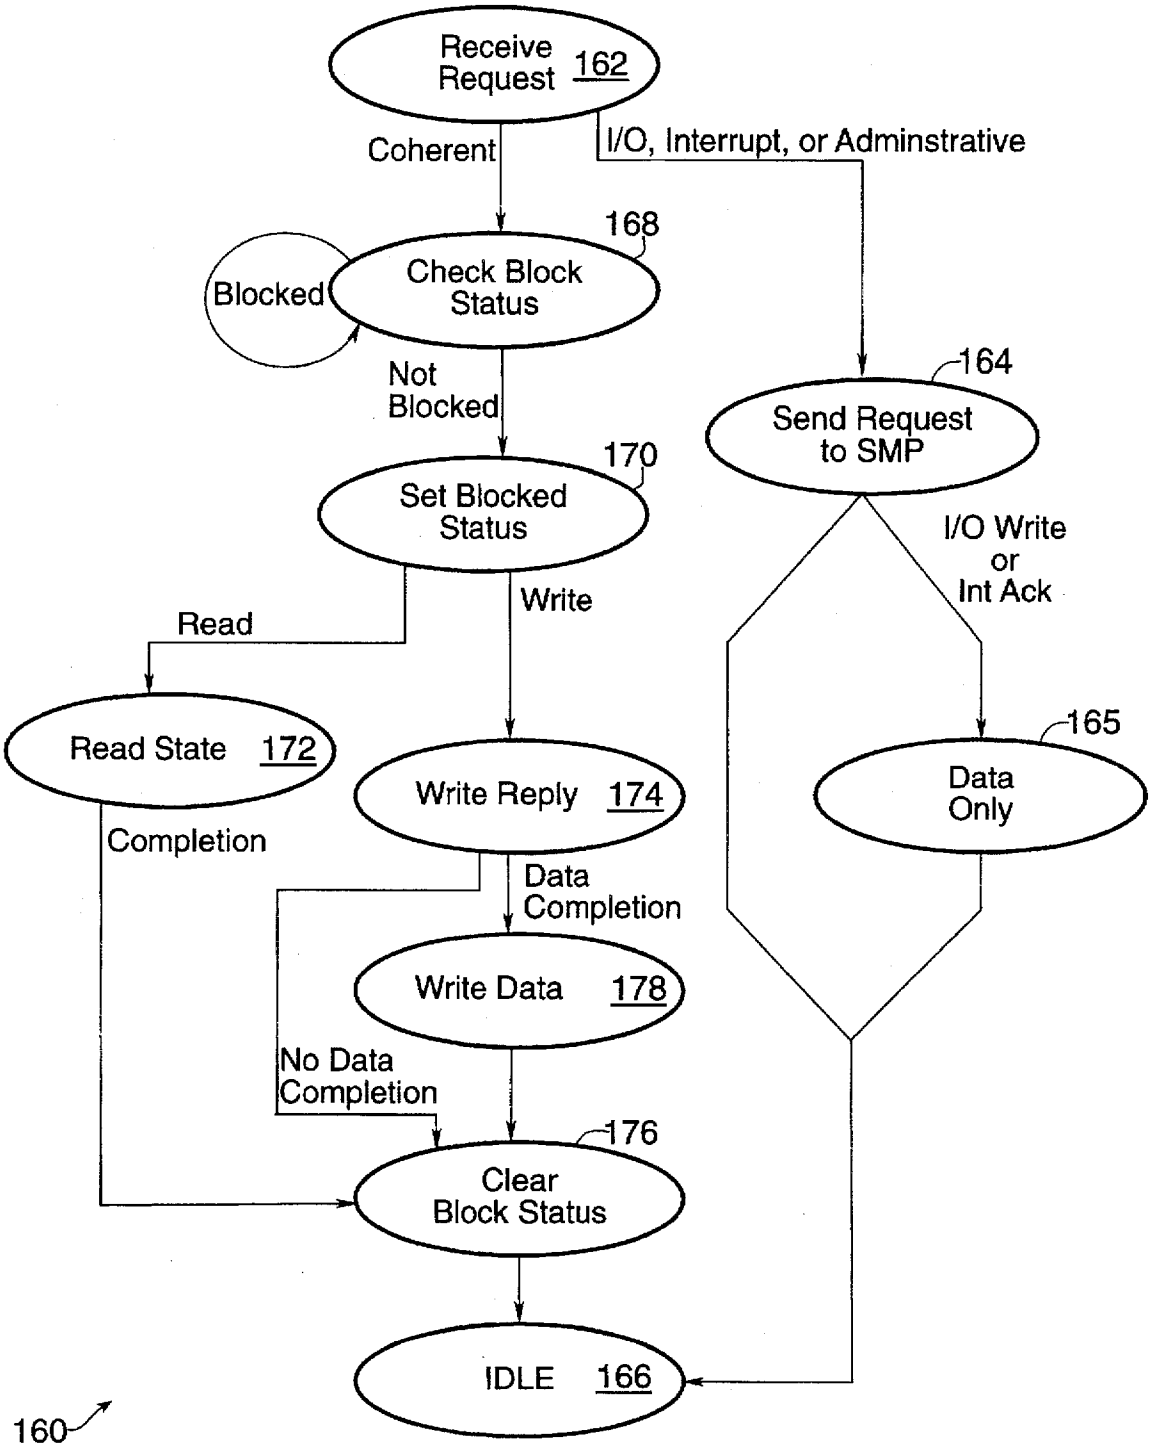
Receive Request 162
Coherent
I/O, Interrupt, or Adminstrative
168
Check Block Status
Blocked
Not Blocked
164
Send Request to SMP
170
Set Blocked Status
I/O Write or Int Ack
Write
Read
165
Read State 172
Write Reply 174
Data Only
Completion
Data Completion
Write Data 178
No Data Completion
176
Clear Block Status
IDLE 166
160

Fig. 7

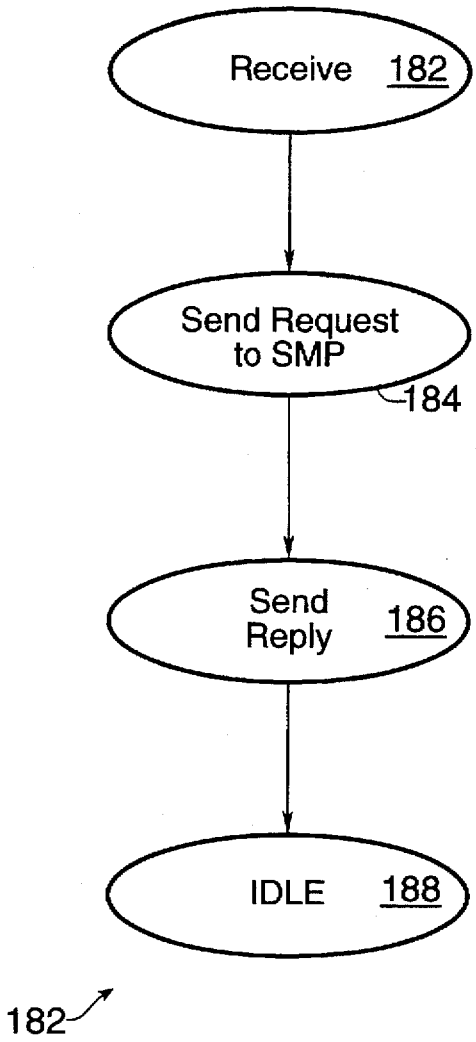
Receive 182
Send Request to SMP
184
Send Reply 186
IDLE 188
182

Fig. 8

192 Request Code	194 Request Type	196 Origin
RTS	Read to Share (COMA)	R
RTO	Read to Own (COMA)	R
RS	Read Stream (COMA)	R
RTSN	Read to Share (NUMA)	R
RTON	Read to Own (NUMA)	R
RSN	Read Stream (NUMA)	R
WB	Write Back	R
INV	Invalidate	R
WS	Write Stream	R
RIO	I/O Read	R
RBIO	I/O Block Read	R
WIO	I/O Write	R
WBIO	I/O Block Write	R
FLU	Flush	R
INT	Interrupt	R
ADM	Administrative	R

190

Fig. 9

192 194 196

Demand Code	Demand Type	Origin
RTS	Read to Share	H
RTO	Read to Own	H
RS	Read Stream	H
INV	Invalidate	H
ADM	Administrative	H

198

Fig. 10

192 194 196

Reply Code	Reply Type	Origin
D	Data	S, H
ACK	Acknowledge	S, H
SNO	Slave Not Owned	S
ANM	Address Not Mapped	S
ERR	Error	S
NACK	Not Acknowledge	H
NOPE	Negative Response	H

200

Fig. 11

192 194 196

Completion Code	Completion Type	Origin
CMP	Completion	R
CMP_D	Completion with Data 1	R
CMP_W	Completion with Data 2	R
CMP_S	Completion - Failed	R

202

Fig. 12

234
236

212 Trans	214 Mtag	216 Req.	218 D	220 D'	222 D-O	224 D-S	226 R-H	228 R-OS	230 R-SS	232 Comp
RTS	i	RTS	m,o,s	-	-	-	ACK	-	-	CMP
RTS	i	RTS	i	s	RTS	-	-	D	-	CMP
RTS	n	RTSN	m,o	-	RTS	-	-	D	-	CMP
RTS	n	RTSN	s,i	s	RTS	-	-	D	-	CMP
RTO	o,s,i	RTO	m	-	-	-	ACK	-	-	CMP
RTO	o,s,i	RTO	o,s	m	INV	INV	-	ACK	ACK	CMP
RTO	o,s,i	RTO	i	m	RTO	INV	-	D	ACK	CMP
RTO	n	RTON	any	m	RTO	INV	-	D	ACK	CMP
RS	i	RS	m,o,s	-	-	-	ACK	-	-	CMP
RS	i	RS	i	-	RS	-	-	D	-	CMP
RS	n	RSN	any	-	RS	-	-	D	-	CMP
WS	o,s,i	INV	any	m	INV	INV	-	ACK	ACK	CMP
WS	n	WS	any	i	INV	INV	-	ACK	ACK	CMP_W
WB	n	WB	m,o	s	-	-	ACK	-	-	CMP_W
WB	n	WB	s,i	-	-	-	NACK	-	-	CMP
INT	-	INT	-	-	-	-	ACK	-	-	CMP_D
INT	-	INT	-	-	-	-	NACK	-	-	CMP
RIO	-	RIO	-	-	-	-	ANM	-	-	CMP
RIO	-	RIO	-	-	-	-	D	-	-	CMP
RBIO	-	RBIO	-	-	-	-	ANM	-	-	CMP
RBIO	-	RBIO	-	-	-	-	D	-	-	CMP
WIO	-	WIO	-	-	-	-	ACK	-	-	CMP_D
WBIO	-	WBIO	-	-	-	-	ACK	-	-	CMP_D
ADM	-	ADM	-	-	-	ADM	-	-	ACK	CMP

210

Fig. 13

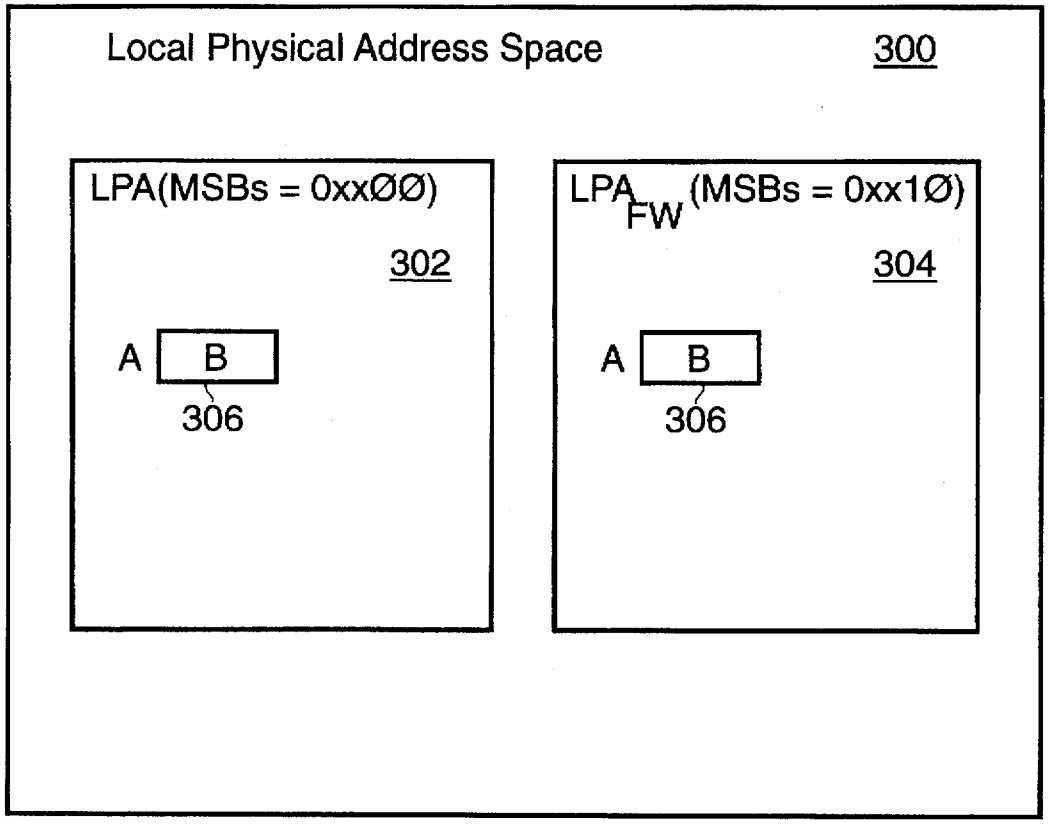
Local Physical Address Space
300
LPA(MSBs = 0xxØØ)
302
A
B
306
LPA FW (MSBs = 0xx1Ø)
304
A
B
306

Fig. 14

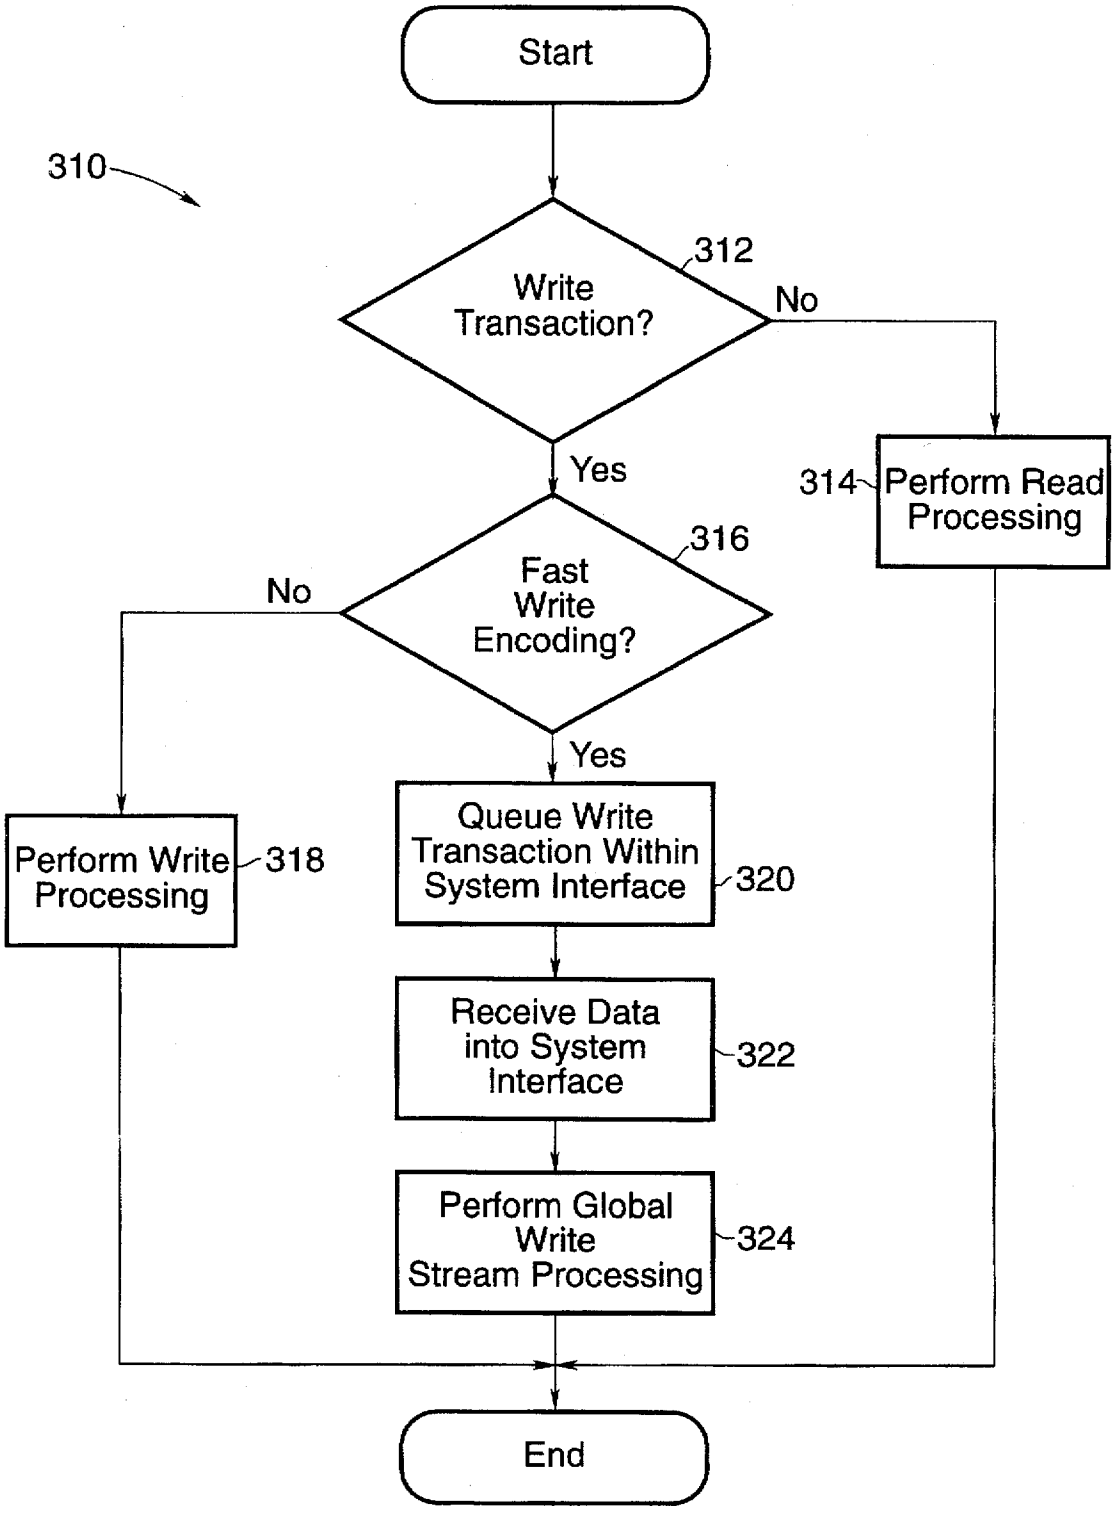
Start
310
312
Write Transaction?
No
Yes
314
Perform Read Processing
316
Fast Write Encoding?
No
Yes
Perform Write Processing
318
Queue Write Transaction Within System Interface
320
Receive Data into System Interface
322
Perform Global Write Stream Processing
324
End

Fig. 15

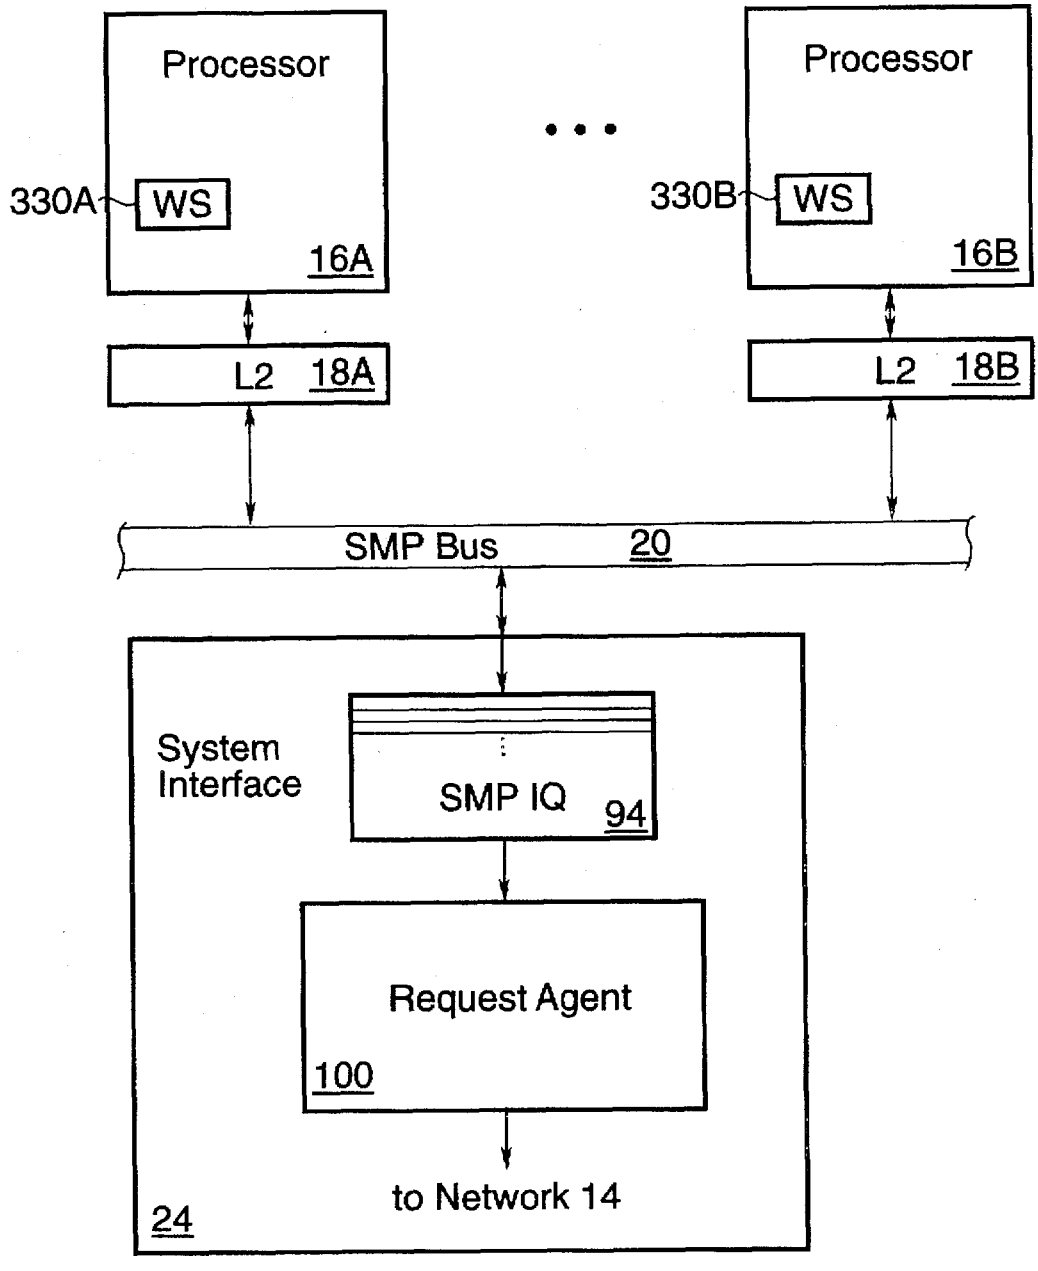
Processor
330A
WS
16A
L2 18A
Processor
330B
WS
16B
L2 18B
SMP Bus 20
System Interface
SMP IQ 94
Request Agent
100
to Network 14
24

Fig. 16

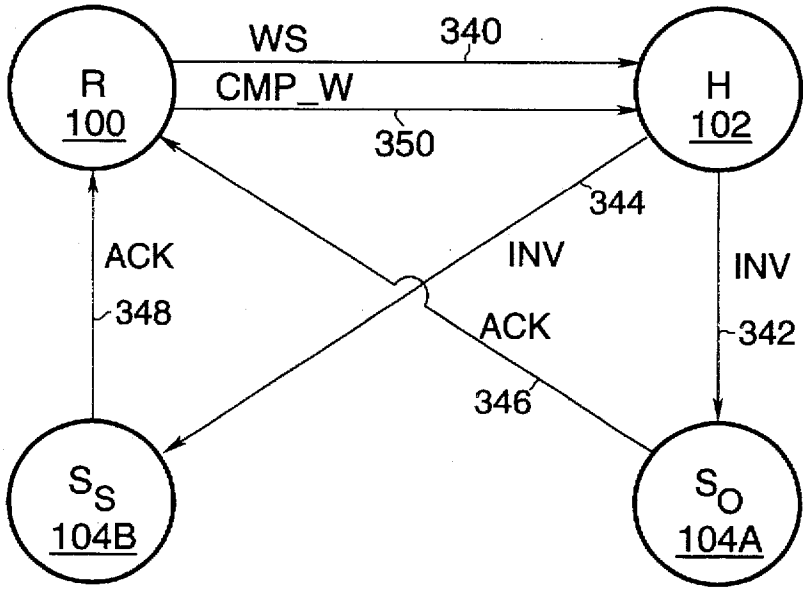
WS
340
CMP_W
350
R
100
H
102
344
ACK
348
INV
ACK
346
INV
342
S_S
104B
S_O
104A

Fig. 17

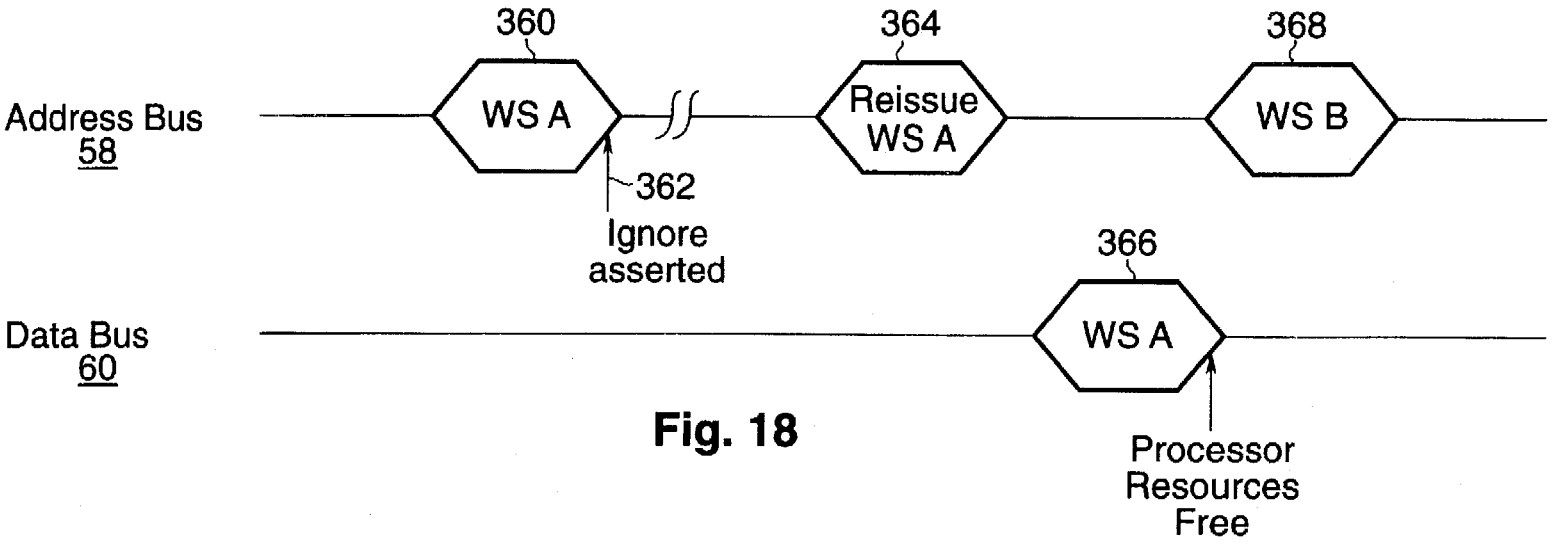
360
364
368
Address Bus
58
WS A
Reissue
WS A
WS B
362
Ignore
asserted
366
Data Bus
60
WS A
Processor
Resources
Free

Fig. 18

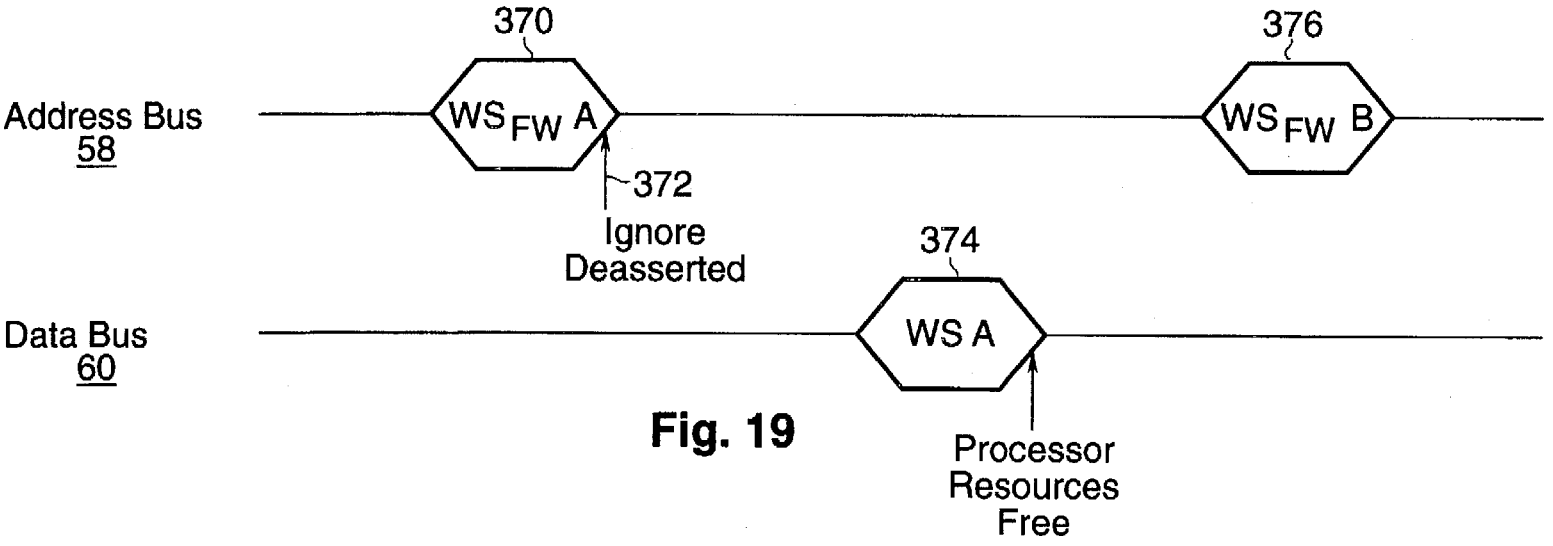
370
376
Address Bus
58
WS FW A
WS FW B
372
Ignore
Deasserted
374
Data Bus
60
WS A
Processor
Resources
Free

Fig. 19

MULTIPROCESSING SYSTEM CONFIGURED TO PERFORM EFFICIENT WRITE OPERATIONS

CROSS REFERENCE TO RELATED PATENT APPLICATIONS

This patent application is related to the following copending, commonly assigned patent applications, the disclosures of which are incorporated herein by reference in their entirety:

1. "Extending The Coherence Domain Beyond A Computer System Bus" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/673,059)

2. "Method And Apparatus optimizing Global Data Replies In A Computer System" by Hagersten, filed concurrently herewith. (Ser. No. 08/675,284)

3. "Method And Apparatus Providing Short Latency Round-Robin Arbitration For Access To A Shared Resource" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/675,286)

4. "Implementing Snooping On A Split-Transaction Computer System Bus" by Singhal et al., filed concurrently herewith. (Ser. No. 08/673,038)

5. "Split Transaction Snooping Bus Protocol" by Singhal et al., filed concurrently herewith. (Ser. No. 08/673,967)

6. "Interconnection Subsystem For A Multiprocessor Computer System With A Small Number Of Processors Using A Switching Arrangement Of Limited Degree" by Heller et al., filed concurrently herewith. (Ser. No. 08/675,629)

7. "System And Method For Performing Deadlock Free Message Transfer In Cyclic Multi-Hop Digital Computer Network" by Wade et al., filed concurrently herewith. (Ser. No. 08/674,277)

8. "Synchronization System And Method For Plesiochronous Signaling" by Cassiday et al., filed concurrently herewith. (Ser. No. 08/674,316)

9. "Methods And Apparatus For A Coherence Transformer For Connecting Computer System Coherence Domains" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/677,015)

10. "Methods And Apparatus For A Coherence Transformer With Limited Memory For Connecting Computer System Coherence Domains" by Hagersten et al., filed concurrently herewith (Ser. No. 08/677,014)

11. "Methods And Apparatus For Sharing Stored Data Objects In A Computer System" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/673,130)

12. "Methods And Apparatus For A Directory-Less Memory Access Protocol In A Distributed Shared Memory Computer System" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/671,303)

13. "Hybrid Memory Access Protocol In A Distributed Shared Memory Computer System" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/673,957)

14. "Methods And Apparatus For Substantially Memory-Less Coherence Transformer For Connecting Computer System Coherence Domains" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/677,012)

15. "A Multiprocessing System Including An Enhanced Blocking Mechanism For Read To Share Transactions In A NUMA Mode" by Hagersten, filed concurrently herewith. (Ser. No. 08/674,271)

16. "Encoding Method For Directory State In Cache Coherent Distributed Shared Memory Systems" by Guzovskiy et al., filed concurrently herewith. (Ser. No. 08/672,946)

17. "Software Use Of Address Translation Mechanism" by Nesheim et al., filed concurrently herewith. (Ser. No. 08/673,043)

18. "Directory-Based, Shared-Memory, Scaleable Multiprocessor Computer System Having Deadlock-free Transaction Flow Sans Flow Control Protocol" by Lowenstein et al., filed concurrently herewith. (Ser. No. 08/674,358)

19. "Maintaining A Sequential Stored Order (SSO) In A Non-SSO Machine" by Nesheim, filed concurrently herewith. (Ser. No. 08/673,049)

20. "Node To Node Interrupt Mechanist In A Multiprocessor System" by Wong-Chan, filed concurrently herewith. (Ser. No. 08/672,947)

21. "Deterministic Distributed Multicache Coherence Protocol" by Hagersten et al., filed Apr. 8, 1996, Ser. No. 08/630,703.

22. "A Hybrid NUMA Coma Caching System And Methods For Selecting Between The Caching Modes" by Hagersten et al., filed Dec. 22, 1995, Ser. No. 08/577,283.

23. "A Hybrid NUMA Coma Caching System And Methods For Selecting Between The Caching Modes" by Wood et al., filed Dec. 22, 1995, Ser. No. 08/575,787.

24. "Flushing Of Cache Memory In A Computer System" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/673,881)

25. "Efficient Allocation Of Cache Memory Space In A Computer System" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/675,306)

26. "Efficient Selection Of Memory Storage Modes In A Computer System" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/674,029)

27. "Skip-level Write-through In A Multi-level Memory Of A Computer System" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/674,560)

28. "A Multiprocessing System Configured to Perform Efficient Block Copy Operations" by Hagersten, filed concurrently herewith. (Ser. No. 08/674,269)

29. "A Multiprocessing System Including An Apparatus For Optimizing Spin-Lock Operations" by Hagersten, filed concurrently herewith. (Ser. No. 08/674,272)

30. "A Multiprocessing System Configured to Detect and Efficiently Provide for Migratory Data Access Patterns" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/674,330)

31. "A Multiprocessing System Configured to Store Coherency State within Multiple Subnodes of a Processing Node" by Hagersten, filed concurrently herewith. (Ser. No. 08/674,274)

32. "A Multiprocessing System Configured to Perform Prefetching Operations" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/674,327)

33. "A Multiprocessing System Configured to Perform Synchronization Operations" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/674,328)

34. "A Multiprocessing System Having Coherency-Related Error Logging Capabilities" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/674,276)

35. "Multiprocessing System Employing A Three-Hop Communication Protocol" by Hagersten, filed concurrently herewith. (Ser. No. 08/674,270)

36. "A Multiprocessing System Configured to Perform Software Initiated Prefetch Operations" by Hagersten, filed concurrently herewith. (Ser. No. 08/674,273)

37. "A Multiprocessing Computer System Employing Local and Global Address Spaces and Multiple Access Modes" by Hagersten, filed concurrently herewith. (Ser. No. 08/675,635)

38. "Multiprocessing System Employing A Coherency Protocol Including A Reply Count" by Hagersten et al., filed concurrently herewith. (Ser. No. 08/674,314)

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to the field of multiprocessor computer systems and, more particularly, to performance of write operations in multiprocessor computer systems.

2. Description of the Relevant Art

Multiprocessing computer systems include two or more processors which may be employed to perform computing tasks. A particular computing task may be performed upon one processor while other processors perform unrelated computing tasks. Alternatively, components of a particular computing task may be distributed among multiple processors to decrease the time required to perform the computing task as a whole. Generally speaking, a processor is a device configured to perform an operation upon one or more operands to produce a result. The operation is performed in response to an instruction executed by the processor.

A popular architecture in commercial multiprocessing computer systems is the symmetric multiprocessor (SMP) architecture. Typically, an SMP computer system comprises multiple processors connected through a cache hierarchy to a shared bus. Additionally connected to the bus is a memory, which is shared among the processors in the system. Access to any particular memory location within the memory occurs in a similar amount of time as access to any other particular memory location. Since each location in the memory may be accessed in a uniform manner, this structure is often referred to as a uniform memory architecture (UMA).

Processors are often configured with internal caches, and one or more caches are typically included in the cache hierarchy between the processors and the shared bus in an SMP computer system. Multiple copies of data residing at a particular main memory address may be stored in these caches. In order to maintain the shared memory model, in which a particular address stores exactly one data value at any given time, shared bus computer systems employ cache coherency. Generally speaking, an operation is coherent if the effects of the operation upon data stored at a particular memory address are reflected in each copy of the data within the cache hierarchy. For example, when data stored at a particular memory address is updated, the update may be supplied to the caches which are storing copies of the previous data. Alternatively, the copies of the previous data may be invalidated in the caches such that a subsequent access to the particular memory address causes the updated copy to be transferred from main memory. For shared bus systems, a snoop bus protocol is typically employed. Each coherent transaction performed upon the shared bus is examined (or "snooped") against data in the caches. If a copy of the affected data is found, the state of the cache line containing the data may be updated in response to the coherent transaction.

Unfortunately, shared bus architectures suffer from several drawbacks which limit their usefulness in multiprocessing computer systems. A bus is capable of a peak bandwidth (e.g. a number of bytes/second which may be transferred across the bus). As additional processors are attached to the bus, the bandwidth required to supply the processors with data and instructions may exceed the peak bus bandwidth. Since some processors are forced to wait for available bus bandwidth, performance of the computer system suffers when the bandwidth requirements of the processors exceeds available bus bandwidth.

Additionally, adding more processors to a shared bus increases the capacitive loading on the bus and may even cause the physical length of the bus to be increased. The increased capacitive loading and extended bus length increases the delay in propagating a signal across the bus. Due to the increased propagation delay, transactions may take longer to perform. Therefore, the peak bandwidth of the bus may actually decrease as more processors are added.

These problems are further magnified by the continued increase in operating frequency and performance of processors. The increased performance enabled by the higher frequencies and more advanced processor microarchitectures results in higher bandwidth requirements than previous processor generations, even for the same number of processors. Therefore, buses which previously provided sufficient bandwidth for a multiprocessing computer system may be insufficient for a similar computer system employing the higher performance processors.

Another structure for multiprocessing computer systems is a distributed shared memory architecture. A distributed shared memory architecture includes multiple nodes within which processors and memory reside. The multiple nodes communicate via a network coupled there between. When considered as a whole, the memory included within the multiple nodes forms the shared memory for the computer system. Typically, directories are used to identify which nodes have cached copies of data corresponding to a particular address. Coherency activities may be generated via examination of the directories.

Distributed shared memory systems are scaleable, overcoming the limitations of the shared bus architecture. Since many of the processor accesses are completed within a node, nodes typically have much lower bandwidth requirements upon the network than a shared bus architecture must provide upon its shared bus. The nodes may operate at high clock frequency and bandwidth, accessing the network when needed. Additional nodes may be added to the network without affecting the local bandwidth of the nodes. Instead, only the network bandwidth is affected.

Unfortunately, processor access to memory stored in a remote node (i.e. a node other than the node containing the processor) is significantly slower than access to memory within the node. In particular, write operations may suffer from severe performance degradation in a distributed shared memory system. If a write operation is performed by a processor in a particular node and the particular node does not have write permission to the coherency unit affected by the write operation, then the write operation is typically stalled until write permission is acquired from the remainder of the system. Stalling the write may occupy processor resources (such as storage locations for the write data) until the write permission is acquired. Accordingly, the processor resources are not available for use by subsequent operations, thus possibly further stalling processor execution. A more efficient method for performing write operations in a distributed shared memory system is desired.

SUMMARY OF THE INVENTION

The problems outlined above are in large part solved by a computer system in accordance with the present invention. The computer system defines a "fast write" protocol for performing certain write operations. Write operations include a particular encoding if they are to be performed using the fast write protocol. When the system interface within a node detects the particular encoding, the write operation is captured by the system interface. In addition,

the data is transferred to the system interface from the processor performing the write operation. The data transfer is performed even if the node is not maintaining a coherency state for the affected coherency unit which is consistent with performing the write operation. Instead, the coherency activity employed to acquire the proper coherency state is initiated subsequent to or in parallel with the receipt of data from the processor. Advantageously, processor resources are free to continue with other computing tasks while the system interface performs coherency activity in response to the write operation. Particularly when a processor performs a large number of write operations in succession, performing the write operations using the fast write protocol may increase performance of the computer system. The write operations may be quickly transferred into the system interface instead of being stalled within the processor awaiting resources occupied by previous write operations.

Fast write operations are performed prior to acquiring write permission to the coherency unit. Ordering with respect to other operations referencing the coherency unit is not maintained. Therefore, the fast write protocol is not suitable for all write operations within the computer system. However, the protocol may be used to increase performance. For example, a group of writes enveloped by software synchronization operations appear to be ordered as a group with respect to operations outside of the synchronization. The performance gained by executing the group of writes using the fast write protocol may outweigh the system bandwidth used to perform synchronization.

Generally, a write operation is executed by a processor within a local processing node and a coherency operation to at least one remote processing node is performed in response to the write operation. If the write operation is coded as a fast write, the write operation is completed within the local processing node prior to ordering of the coherency operation globally. Conversely, if the write operation is not coded as a fast write, then the write operation is completed within the local node subsequent to ordering of the coherency operation globally.

Broadly speaking, the present invention contemplates a method for performing write operations in a multiprocessing computer system. A write operation is executed by a processor within a local processing node of the multiprocessing computer system. A coherency operation to at least one remote processing node is performed in response to the write operation. If the write operation includes a specific predefined encoding, the write operation is completed within the local processing node prior to completion of the coherency operation. Alternatively, if the write operation includes an encoding different than the specific predefined encoding, the write operation is completed within the local processing node subsequent to completion of the coherency operation.

The present invention further contemplates an apparatus for performing write operations in a multiprocessing computer system comprising a processor and a system interface. The processor is configured to perform a write operation. Coupled to receive the write operation and to perform a coherency operation in response to the write operation, the system interface is configured to complete the write operation with respect to the processor prior to completing the coherency operation if the write operation includes a specific predefined encoding. The system interface is further configured to inhibit completion of the write operation with respect to the processor until completion of the coherency operation if the write operation includes a different encoding than the specific predefined encoding.

The present invention still further contemplates a computer system comprising a first processing node and a second processing node. The first processing node includes at least one processor configured to perform a write operation. Additionally, the first processing node is configured to complete the write operation with respect to the processor prior to the first processing node acquiring a coherency state allowing the write operation if the write operation includes a predefined encoding. The second processing node is configured as a home node of a coherency unit affected by the write operation. The second processing node is coupled to receive a coherency request from the first processing node which conveys the coherency request in order to acquire the appropriate coherency state.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the invention will become apparent upon reading the following detailed description and upon reference to the accompanying drawings in which:

FIG. **1** is a block diagram of a multiprocessor computer system.

FIG. **1A** is a conceptualized block diagram depicting a non-uniform memory architecture supported by one embodiment of the computer system shown in FIG. **1**.

FIG. **1B** is a conceptualized block diagram depicting a cache-only memory architecture supported by one embodiment of the computer system shown in FIG. **1**.

FIG. **2** is a block diagram of one embodiment of an symmetric multiprocessing node depicted in FIG. **1**.

FIG. **2A** is an exemplary directory entry stored in one embodiment of a directory depicted in FIG. **2**.

FIG. **3** is a block diagram of one embodiment of a system interface shown in FIG. **1**.

FIG. **4** is a diagram depicting activities performed in response to a typical coherency operation between a request agent, a home agent, and a slave agent.

FIG. **5** is an exemplary coherency operation performed in response to a read to own request from a processor.

FIG. **6** is a flowchart depicting an exemplary state machine for one embodiment of a request agent shown in FIG. **3**.

FIG. **7** is a flowchart depicting an exemplary state machine for one embodiment of a home agent shown in FIG. **3**.

FIG. **8** is a flowchart depicting an exemplary state machine for one embodiment of a slave agent shown in FIG. **3**.

FIG. **9** is a table listing request types according to one embodiment of the system interface.

FIG. **10** is a table listing demand types according to one embodiment of the system interface.

FIG. **11** is a table listing reply types according to one embodiment of the system interface.

FIG. **12** is a table listing completion types according to one embodiment of the system interface.

FIG. **13** is a table describing coherency operations in response to various operations performed by a processor, according to one embodiment of the system interface.

FIG. **14** is a diagram depicting a local physical address space including aliases.

FIG. **15** is a flow chart depicting steps executed by a system interface within the computer system shown in FIG. **1** to perform a write operation according to one embodiment.

FIG. **16** is a block diagram of a portion of one embodiment of an SMP node shown in FIG. **1**, depicting performance of a write operation.

FIG. **17** is a diagram depicting coherency activities performed by one embodiment of the computer system shown in FIG. **1** in response to a write operation.

FIG. **18** is a timing diagram depicting a write stream operation.

FIG. **19** is a timing diagram depicting a fast write stream operation.

While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof are shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that the drawings and detailed description thereto are not intended to limit the invention to the particular form disclosed, but on the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the present invention as defined by the appended claims.

DETAILED DESCRIPTION OF THE INVENTION

Turning now to FIG. **1**, a block diagram of one embodiment of a multiprocessing computer system **10** is shown. Computer system **10** includes multiple SMP nodes **12**A–**12**D interconnected by a point-to-point network **14**. Elements referred to herein with a particular reference number followed by a letter will be collectively referred to by the reference number alone. For example, SMP nodes **12**A–**12**D will be collectively referred to as SMP nodes **12**. In the embodiment shown, each SMP node **12** includes multiple processors, external caches, an SMP bus, a memory, and a system interface. For example, SMP node **12**A is configured with multiple processors including processors **16**A–**16**B. The processors **16** are connected to external caches **18**, which are further coupled to an SMP bus **20**. Additionally, a memory **22** and a system interface **24** are coupled to SMP bus **20**. Still further, one or more input/output (I/O) interfaces **26** may be coupled to SMP bus **20**. I/O interfaces **26** are used to interface to peripheral devices such as serial and parallel ports, disk drives, modems, printers, etc. Other SMP nodes **12**B–**12**D may be configured similarly.

Generally speaking, computer system **10** is optimized for performing write operations from a local SMP node **12** to a remote SMP node **12**. A processor **16** within the local SMP node **12** performs a write operation having a specific encoding indicating that the write operation is to be performed using a "fast write" protocol. System interface **24**, upon detection of the "fast write" write operation, stores the write operation and also allows transfer of the data corresponding to the write operation from the processor into the system interface. In this case, the data is transferred prior to performing coherency operations to acquire ownership of the coherency unit affected by the write operation (e.g. to acquire write permission to the coherency unit). Advantageously, processor **16** completes the write operation quickly. Resources internal to processor **16** are freed for use in subsequent operations. Performance of the computer system may be increased by freeing processor resources more rapidly than was previously achievable.

In one particular embodiment, certain of the most significant bits of the address presented by processor **16** upon SMP bus **20** indicate that the fast write protocol is to be used for a particular write operation. The remaining bits specify the destination node and the local physical address identifying a destination storage location within memory **22** of the destination node. Alternatively, the remaining bits may be a global address identifying a remote node which stores the affected coherency unit. Additionally, the fast write protocol is restricted to write stream operations in the particular embodiment. Write stream operations update an entire coherency unit. Therefore, the processor **16** performing the write stream operation need not obtain a copy of the coherency unit for updating. The fast write protocol additionally removes the ordering requirements for the write stream operations, allowing these operations to be removed from the processor **16** quickly. These write stream operations are ordered with respect to each other but not the other operations performed by the processor **16**.

The fast write protocol may be useful for many purposes. Generally speaking, a write operation to be performed to a remote node and for which acquiring a local copy in the local node is not desired may be advantageously performed via the fast write protocol. For example, a write operation using a global address upon SMP bus **20** may be performed using the fast write protocol. As another example, a block copy of a local source block (e.g. a page) to a remote destination block may be performed. In order to perform the block copy operation, a processor **16** reads data from the local source block and writes the data to the remote destination block. The processor **16** may write the data to the remote destination block using the fast write protocol. Additionally, large interprocessor communications blocks (i.e. several coherency units) may be transferred using the fast write protocol. Smaller blocks may not utilize the fast write protocol because a synchronizing operation may be required between transmittal of the communications blocks and the setting of a flag indicating that the communications blocks are available for the receiving processor.

Generally speaking, a memory operation is an operation causing transfer of data from a source to a destination. The source and/or destination may be storage locations within the initiator, or may be storage locations within memory. When a source or destination is a storage location within memory, the source or destination is specified via an address conveyed with the memory operation. Memory operations may be read or write operations. A read operation causes transfer of data from a source outside of the initiator to a destination within the initiator. Conversely, a write operation causes transfer of data from a source within the initiator to a destination outside of the initiator. In the computer system shown in FIG. **1**, a memory operation may include one or more transactions upon SMP bus **20** as well as one or more coherency operations upon network **14**.

Architectural Overview

Each SMP node **12** is essentially an SMP system having memory **22** as the shared memory. Processors **16** are high performance processors. In one embodiment, each processor **16** is a SPARC processor compliant with version **9** of the SPARC processor architecture. It is noted, however, that any processor architecture may be employed by processors **16**.

Typically, processors **16** include internal instruction and data caches. Therefore, external caches **18** are labeled as L2 caches (for level **2**, wherein the internal caches are level **1** caches). If processors **16** are not configured with internal caches, then external caches **18** are level **1** caches. It is noted that the "level" nomenclature is used to identify proximity of a particular cache to the processing core within processor **16**. Level **1** is nearest the processing core, level **2** is next nearest, etc. External caches **18** provide rapid access to memory addresses frequently accessed by the processor **16** coupled thereto. It is noted that external caches **18** may be configured in any of a variety of specific cache arrangements. For

example, set-associative or direct-mapped configurations may be employed by external caches **18**.

SMP bus **20** accommodates communication between processors **16** (through caches **18**), memory **22**, system interface **24**, and I/O interface **26**. In one embodiment, SMP bus **20** includes an address bus and related control signals, as well as a data bus and related control signals. Because the address and data buses are separate, a split-transaction bus protocol may be employed upon SMP bus **20**. Generally speaking, a split-transaction bus protocol is a protocol in which a transaction occurring upon the address bus may differ from a concurrent transaction occurring upon the data bus. Transactions involving address and data include an address phase in which the address and related control information is conveyed upon the address bus, and a data phase in which the data is conveyed upon the data bus. Additional address phases and/or data phases for other transactions may be initiated prior to the data phase corresponding to a particular address phase. An address phase and the corresponding data phase may be correlated in a number of ways. For example, data transactions may occur in the same order that the address transactions occur. Alternatively, address and data phases of a transaction may be identified via a unique tag.

Memory **22** is configured to store data and instruction code for use by processors **16**. Memory **22** preferably comprises dynamic random access memory (DRAM), although any type of memory may be used. Memory **22**, in conjunction with similar illustrated memories in the other SMP nodes **12**, forms a distributed shared memory system. Each address in the address space of the distributed shared memory is assigned to a particular node, referred to as the home node of the address. A processor within a different node than the home node may access the data at an address of the home node, potentially caching the data. Therefore, coherency is maintained between SMP nodes **12** as well as among processors **16** and caches **18** within a particular SMP node **12A–12D**. System interface **24** provides internode coherency, while snooping upon SMP bus **20** provides intranode coherency.

In addition to maintaining internode coherency, system interface **24** detects addresses upon SMP bus **20** which require a data transfer to or from another SMP node **12**. System interface **24** performs the transfer, and provides the corresponding data for the transaction upon SMP bus **20**. In the embodiment shown, system interface **24** is coupled to a point-to-point network **14**. However, it is noted that in alternative embodiments other networks may be used. In a point-to-point network, individual connections exist between each node upon the network. A particular node communicates directly with a second node via a dedicated link. To communicate with a third node, the particular node utilizes a different link than the one used to communicate with the second node.

It is noted that, although four SMP nodes **12** are shown in FIG. **1**, embodiments of computer system **10** employing any number of nodes are contemplated.

FIGS. **1A** and **1B** are conceptualized illustrations of distributed memory architectures supported by one embodiment of computer system **10**. Specifically, FIGS. **1A** and **1B** illustrate alternative ways in which each SMP node **12** of FIG. **1** may cache data and perform memory accesses. Details regarding the manner in which computer system **10** supports such accesses will be described in further detail below.

Turning now to FIG. **1A**, a logical diagram depicting a first memory architecture **30** supported by one embodiment of computer system **10** is shown. Architecture **30** includes multiple processors **32A–32D**, multiple caches **34A–34D**, multiple memories **36A–36D**, and an interconnect network **38**. The multiple memories **36** form a distributed shared memory. Each address within the address space corresponds to a location within one of memories **36**.

Architecture **30** is a non-uniform memory architecture (NUMA). In a NUMA architecture, the amount of time required to access a first memory address may be substantially different than the amount of time required to access a second memory address. The access time depends upon the origin of the access and the location of the memory **36A–36D** which stores the accessed data. For example, if processor **32A** accesses a first memory address stored in memory **36A**, the access time may be significantly shorter than the access time for an access to a second memory address stored in one of memories **36B–36D**. That is, an access by processor **32A** to memory **36A** may be completed locally (e.g. without transfers upon network **38**), while a processor **32A** access to memory **36B** is performed via network **38**. Typically, an access through network **38** is slower than an access completed within a local memory. For example, a local access might be completed in a few hundred nanoseconds while an access via the network might occupy a few microseconds.

Data corresponding to addresses stored in remote nodes may be cached in any of the caches **34**. However, once a cache **34** discards the data corresponding to such a remote address, a subsequent access to the remote address is completed via a transfer upon network **38**.

NUMA architectures may provide excellent performance characteristics for software applications which use addresses that correspond primarily to a particular local memory. Software applications which exhibit more random access patterns and which do not confine their memory accesses to addresses within a particular local memory, on the other hand, may experience a large amount of network traffic as a particular processor **32** performs repeated accesses to remote nodes.

Turning now to FIG. **1B**, a logic diagram depicting a second memory architecture **40** supported by the computer system **10** of FIG. **1** is shown. Architecture **40** includes multiple processors **42A–42D**, multiple caches **44A–44D**, multiple memories **46A–46D**, and network **48**. However, memories **46** are logically coupled between caches **44** and network **48**. Memories **46** serve as larger caches (e.g. a level **3** cache), storing addresses which are accessed by the corresponding processors **42**. Memories **46** are said to "attract" the data being operated upon by a corresponding processor **42**. As opposed to the NUMA architecture shown in FIG. **1A**, architecture **40** reduces the number of accesses upon the network **48** by storing remote data in the local memory when the local processor accesses that data.

Architecture **40** is referred to as a cache-only memory architecture (COMA). Multiple locations within the distributed shared memory formed by the combination of memories **46** may store data corresponding to a particular address. No permanent mapping of a particular address to a particular storage location is assigned. Instead, the location storing data corresponding to the particular address changes dynamically based upon the processors **42** which access that particular address. Conversely, in the NUMA architecture a particular storage location within memories **46** is assigned to a particular address. Architecture **40** adjusts to the memory access patterns performed by applications executing thereon, and coherency is maintained between the memories **46**.

In a preferred embodiment, computer system **10** supports both of the memory architectures shown in FIGS. **1**A and **1**B. In particular, a memory address may be accessed in a NUMA fashion from one SMP node **12**A–**12**D while being accessed in a COMA manner from another SMP node **12**A–**12**D. In one embodiment, a NUMA access is detected if certain bits of the address upon SMP bus **20** identify another SMP node **12** as the home node of the address presented. Otherwise, a COMA access is presumed. Additional details will be provided below.

In one embodiment, the COMA architecture is implemented using a combination of hardware and software techniques. Hardware maintains coherency between the locally cached copies of pages, and software (e.g. the operating system employed in computer system **10**) is responsible for allocating and deallocating cached pages.

FIG. **2** depicts details of one implementation of an SMP node **12**A that generally conforms to the SMP node **12**A shown in FIG. **1**. Other nodes **12** may be configured similarly. It is noted that alternative specific implementations of each SMP node **12** of FIG. **1** are also possible. The implementation of SMP node **12**A shown in FIG. **2** includes multiple subnodes such as subnodes **50**A and **50**B. Each subnode **50** includes two processors **16** and corresponding caches **18**, a memory portion **56**, an address controller **52**, and a data controller **54**. The memory portions **56** within subnodes **50** collectively form the memory **22** of the SMP node **12**A of FIG. **1**. Other subnodes (not shown) are further coupled to SMP bus **20** to form the I/O interfaces **26**.

As shown in FIG. **2**, SMP bus **20** includes an address bus **58** and a data bus **60**. Address controller **52** is coupled to address bus **58**, and data controller **54** is coupled to data bus **60**. FIG. **2** also illustrates system interface **24**, including a system interface logic block **62**, a translation storage **64**, a directory **66**, and a memory tag (MTAG) **68**. Logic block **62** is coupled to both address bus **58** and data bus **60**, and asserts an ignore signal **70** upon address bus **58** under certain circumstances as will be explained further below. Additionally, logic block **62** is coupled to translation storage **64**, directory **66**, MTAG **68**, and network **14**.

For the embodiment of FIG. **2**, each subnode **50** is configured upon a printed circuit board which may be inserted into a backplane upon which SMP bus **20** is situated. In this manner, the number of processors and/or I/O interfaces **26** included within an SMP node **12** may be varied by inserting or removing subnodes **50**. For example, computer system **10** may initially be configured with a small number of subnodes **50**. Additional subnodes **50** may be added from time to time as the computing power required by the users of computer system **10** grows.

Address controller **52** provides an interface between caches **18** and the address portion of SMP bus **20**. In the embodiment shown, address controller **52** includes an out queue **72** and some number of in queues **74**. Out queue **72** buffers transactions from the processors connected thereto until address controller **52** is granted access to address bus **58**. Address controller **52** performs the transactions stored in out queue **72** in the order those transactions were placed into out queue **72** (i.e. out queue **72** is a FIFO queue). Transactions performed by address controller **52** as well as transactions received from address bus **58** which are to be snooped by caches **18** and caches internal to processors **16** are placed into in queue **74**.

Similar to out queue **72**, in queue **74** is a FIFO queue. All address transactions are stored in the in queue **74** of each subnode **50** (even within the in queue **74** of the subnode **50** which initiates the address transaction). Address transactions are thus presented to caches **18** and processors **16** for snooping in the order they occur upon address bus **58**. The order that transactions occur upon address bus **58** is the order for SMP node **12**A. However, the complete system is expected to have one global memory order. This ordering expectation creates a problem in both the NUMA and COMA architectures employed by computer system **10**, since the global order may need to be established by the order of operations upon network **14**. If two nodes perform a transaction to an address, the order that the corresponding coherency operations occur at the home node for the address defines the order of the two transactions as seen within each node. For example, if two write transactions are performed to the same address, then the second write operation to arrive at the address' home node should be the second write transaction to complete (i.e. a byte location which is updated by both write transactions stores a value provided by the second write transaction upon completion of both transactions). However, the node which performs the second transaction may actually have the second transaction occur first upon SMP bus **20**. Ignore signal **70** allows the second transaction to be transferred to system interface **24** without the remainder of the SMP node **12** reacting to the transaction.

Therefore, in order to operate effectively with the ordering constraints imposed by the out queue/in queue structure of address controller **52**, system interface logic block **62** employs ignore signal **70**. When a transaction is presented upon address bus **58** and system interface logic block **62** detects that a remote transaction is to be performed in response to the transaction, logic block **62** asserts the ignore signal **70**. Assertion of the ignore signal **70** with respect to a transaction causes address controller **52** to inhibit storage of the transaction into in queues **74**. Therefore, other transactions which may occur subsequent to the ignored transaction and which complete locally within SMP node **12**A may complete out of order with respect to the ignored transaction without violating the ordering rules of in queue **74**. In particular, transactions performed by system interface **24** in response to coherency activity upon network **14** may be performed and completed subsequent to the ignored transaction. When a response is received from the remote transaction, the ignored transaction may be reissued by system interface logic block **62** upon address bus **58**. The transaction is thereby placed into in queue **74**, and may complete in order with transactions occurring at the time of reissue.

It is noted that in one embodiment, once a transaction from a particular address controller **52** has been ignored, subsequent coherent transactions from that particular address controller **52** are also ignored. Transactions from a particular processor **16** may have an important ordering relationship with respect to each other, independent of the ordering requirements imposed by presentation upon address bus **58**. For example, a transaction may be separated from another transaction by a memory synchronizing instruction such as the MEMBAR instruction included in the SPARC architecture. The processor **16** conveys the transactions in the order the transactions are to be performed with respect to each other. The transactions are ordered within out queue **72**, and therefore the transactions originating from a particular out queue **72** are to be performed in order. Ignoring subsequent transactions from a particular address controller **52** allows the in-order rules for a particular out queue **72** to be preserved. It is further noted that not all transactions from a particular processor must be ordered.

However, it is difficult to determine upon address bus **58** which transactions must be ordered and which transactions may not be ordered. Therefore, in this implementation, logic block **62** maintains the order of all transactions from a particular out queue **72**. It is noted that other implementations of subnode **50** are possible that allow exceptions to this rule.

Data controller **54** routes data to and from data bus **60**, memory portion **56** and caches **18**. Data controller **54** may include in and out queues similar to address controller **52**. In one embodiment, data controller **54** employs multiple physical units in a byte-sliced bus configuration.

Processors **16** as shown in FIG. **2** include memory management units (MMUs) **76A–76B**. MMUs **76** perform a virtual to physical address translation upon the data addresses generated by the instruction code executed upon processors **16**, as well as the instruction addresses. The addresses generated in response to instruction execution are virtual addresses. In other words, the virtual addresses are the addresses created by the programmer of the instruction code. The virtual addresses are passed through an address translation mechanism (embodied in MMUs **76**), from which corresponding physical addresses are created. The physical address identifies a storage location within memory **22**.

Address translation is performed for many reasons. For example, the address translation mechanism may be used to grant or deny a particular computing task's access to certain memory addresses. In this manner, the data and instructions within one computing task are isolated from the data and instructions of another computing task. Additionally, portions of the data and instructions of a computing task may be "paged out" to a hard disk drive. When a portion is paged out, the translation is invalidated. Upon access to the portion by the computing task, an interrupt occurs due to the failed translation. The interrupt allows the operating system to retrieve the corresponding information from the hard disk drive. In this manner, more virtual memory may be available than actual memory in memory **22**. Many other uses for virtual memory are well known.

Referring back to the computer system **10** shown in FIG. **1** in conjunction with the SMP node **12A** implementation illustrated in FIG. **2**, the physical address computed by MMUs **76** is a local physical address (LPA) defining a location within the memory **22** associated with the SMP node **12** in which the processor **16** is located. MTAG **68** stores a coherency state for each "coherency unit" in memory **22**. When an address transaction is performed upon SMP bus **20**, system interface logic block **62** examines the coherency state stored in MTAG **68** for the accessed coherency unit. If the coherency state indicates that the SMP node **12** has sufficient access rights to the coherency unit to perform the access, then the address transaction proceeds. If, however, the coherency state indicates that coherency activity should be performed prior to completion of the transaction, then system interface logic block **62** asserts the ignore signal **70**. Logic block **62** performs coherency operations upon network **14** to acquire the appropriate coherency state. When the appropriate coherency state is acquired, logic block **62** reissues the ignored transaction upon SMP bus **20**. Subsequently, the transaction completes.

Generally speaking, the coherency state maintained for a coherency unit at a particular storage location (e.g. a cache or a memory **22**) indicates the access rights to the coherency unit at that SMP node **12**. The access right indicates the validity of the coherency unit, as well as the read/write permission granted for the copy of the coherency unit within that SMP node **12**. In one embodiment, the coherency states employed by computer system **10** are modified, owned, shared, and invalid. The modified state indicates that the SMP node **12** has updated the corresponding coherency unit. Therefore, other SMP nodes **12** do not have a copy of the coherency unit. Additionally, when the modified coherency unit is discarded by the SMP node **12**, the coherency unit is stored back to the home node. The owned state indicates that the SMP node **12** is responsible for the coherency unit, but other SMP nodes **12** may have shared copies. Again, when the coherency unit is discarded by the SMP node **12**, the coherency unit is stored back to the home node. The shared state indicates that the SMP node **12** may read the coherency unit but may not update the coherency unit without acquiring the owned state. Additionally, other SMP nodes **12** may have copies of the coherency unit as well. Finally, the invalid state indicates that the SMP node **12** does not have a copy of the coherency unit. In one embodiment, the modified state indicates write permission and any state but invalid indicates read permission to the corresponding coherency unit.

As used herein, a coherency unit is a number of contiguous bytes of memory which are treated as a unit for coherency purposes. For example, if one byte within the coherency unit is updated, the entire coherency unit is considered to be updated. In one specific embodiment, the coherency unit is a cache line, comprising 64 contiguous bytes. It is understood, however, that a coherency unit may comprise any number of bytes.

System interface **24** also includes a translation mechanism which utilizes translation storage **64** to store translations from the local physical address to a global address (GA). Certain bits within the global address identify the home node for the address, at which coherency information is stored for that global address. For example, an embodiment of computer system **10** may employ four SMP nodes **12** such as that of FIG. **1**. In such an embodiment, two bits of the global address identify the home node. Preferably, bits from the most significant portion of the global address are used to identify the home node. The same bits are used in the local physical address to identify NUMA accesses. If the bits of the LPA indicate that the local node is not the home node, then the LPA is a global address and the transaction is performed in NUMA mode. Therefore, the operating system places global addresses in MMUs **76** for any NUMA-type pages. Conversely, the operating system places LPAs in MMU **76** for any COMA-type pages. It is noted that an LPA may equal a GA (for NUMA accesses as well as for global addresses whose home is within the memory **22** in the node in which the LPA is presented). Alternatively, an LPA may be translated to a GA when the LPA identifies storage locations used for storing copies of data having a home in another SMP node **12**.

The directory **66** of a particular home node identifies which SMP nodes **12** have copies of data corresponding to a given global address assigned to the home node such that coherency between the copies may be maintained. Additionally, the directory **66** of the home node identifies the SMP node **12** which owns the coherency unit. Therefore, while local coherency between caches **18** and processors **16** is maintained via snooping, system-wide (or global) coherency is maintained using MTAG **68** and directory **66**. Directory **66** stores the coherency information corresponding to the coherency units which are assigned to SMP node **12A** (i.e. for which SMP node **12A** is the home node).

It is noted that for the embodiment of FIG. **2**, directory **66** and MTAG **68** store information for each coherency unit

(i.e., on a coherency unit basis). Conversely, translation storage **64** stores local physical to global address translations defined for pages. A page includes multiple coherency units, and is typically several kilobytes or even megabytes in size.

Software accordingly creates local physical address to global address translations on a page basis (thereby allocating a local memory page for storing a copy of a remotely stored global page). Therefore, blocks of memory **22** are allocated to a particular global address on a page basis as well. However, as stated above, coherency states and coherency activities are performed upon a coherency unit. Therefore, when a page is allocated in memory to a particular global address, the data corresponding to the page is not necessarily transferred to the allocated memory. Instead, as processors **16** access various coherency units within the page, those coherency units are transferred from the owner of the coherency unit. In this manner, the data actually accessed by SMP node **12A** is transferred into the corresponding memory **22**. Data not accessed by SMP node **12A** may not be transferred, thereby reducing overall bandwidth usage upon network **14** in comparison to embodiments which transfer the page of data upon allocation of the page in memory **22**.

It is noted that in one embodiment, translation storage **64**, directory **66**, and/or MTAG **68** may be caches which store only a portion of the associated translation, directory, and MTAG information, respectively. The entirety of the translation, directory, and MTAG information is stored in tables within memory **22** or a dedicated memory storage (not shown). If required information for an access is not found in the corresponding cache, the tables are accessed by system interface **24**.

Turning now to FIG. **2A**, an exemplary directory entry **71** is shown. Directory entry **71** may be employed by one embodiment of directory **66** shown in FIG. **2**. Other embodiments of directory **66** may employ dissimilar directory entries. Directory entry **71** includes a valid bit **73**, a write back bit **75**, an owner field **77**, and a sharers field **79**. Directory entry **71** resides within the table of directory entries, and is located within the table via the global address identifying the corresponding coherency unit. More particularly, the directory entry **71** associated with a coherency unit is stored within the table of directory entries at an offset formed from the global address which identifies the coherency unit.

Valid bit **73** indicates, when set, that directory entry **71** is valid (i.e. that directory entry **71** is storing coherency information for a corresponding coherency unit). When clear, valid bit **73** indicates that directory entry **71** is invalid.

Owner field **77** identifies one of SMP nodes **12** as the owner of the coherency unit. The owning SMP node **12A–12D** maintains the coherency unit in either the modified or owned states. Typically, the owning SMP node **12A–12D** acquires the coherency unit in the modified state (see FIG. **13** below). Subsequently, the owning SMP node **12A–12D** may then transition to the owned state upon providing a copy of the coherency unit to another SMP node **12A–12D**. The other SMP node **12A–12D** acquires the coherency unit in the shared state. In one embodiment, owner field **77** comprises two bits encoded to identify one of four SMP nodes **12A–12D** as the owner of the coherency unit.

Sharers field **79** includes one bit assigned to each SMP node **12A–12D**. If an SMP node **12A–12D** is maintaining a shared copy of the coherency unit, the corresponding bit within sharers field **79** is set. Conversely, if the SMP node **12A–12D** is not maintaining a shared copy of the coherency unit, the corresponding bit within sharers field **79** is clear. In this manner, sharers field **79** indicates all of the shared copies of the coherency unit which exist within the computer system **10** of FIG. **1**.

Write back bit **75** indicates, when set, that the SMP node **12A–12D** identified as the owner of the coherency unit via owner field **77** has written the updated copy of the coherency unit to the home SMP node **12**. When clear, bit **75** indicates that the owning SMP node **12A–12D** has not written the updated copy of the coherency unit to the home SMP node **12A–12D**.

Turning now to FIG. **3**, a block diagram of one embodiment of system interface **24** is shown. As shown in FIG. **3**, system interface **24** includes directory **66**, translation storage **64**, and MTAG **68**. Translation storage **64** is shown as a global address to local physical address (GA2LPA) translation unit **80** and a local physical address to global address (LPA2GA) translation unit **82**.

System interface **24** also includes input and output queues for storing transactions to be performed upon SMP bus **20** or network **14**. Specifically, for the embodiment shown, system interface **24** includes input header queue **84** and output header queue **86** for buffering header packets to and from network **14**. Header packets identify an operation to be performed, and specify the number and format of any data packets which may follow. Output header queue **86** buffers header packets to be transmitted upon network **14**, and input header queue **84** buffers header packets received from network **14** until system interface **24** processes the received header packets. Similarly, data packets are buffered in input data queue **88** and output data queue **90** until the data may be transferred upon SMP data bus **60** and network **14**, respectively.

SMP out queue **92**, SMP in queue **94**, and SMP I/O in queue (PIQ) **96** are used to buffer address transactions to and from address bus **58**. SMP out queue **92** buffers transactions to be presented by system interface **24** upon address bus **58**. Reissue transactions queued in response to the completion of coherency activity with respect to an ignored transaction are buffered in SMP out queue **92**. Additionally, transactions generated in response to coherency activity received from network **14** are buffered in SMP out queue **92**. SMP in queue **94** stores coherency related transactions to be serviced by system interface **24**. Conversely, SMP PIQ **96** stores I/O transactions to be conveyed to an I/O interface residing in another SMP node **12**. I/O transactions generally are considered non-coherent and therefore do not generate coherency activities.

SMP in queue **94** and SMP PIQ **96** receive transactions to be queued from a transaction filter **98**. Transaction filter **98** is coupled to MTAG **68** and SMP address bus **58**. If transaction filter **98** detects an I/O transaction upon address bus **58** which identifies an I/O interface upon another SMP node **12**, transaction filter **98** places the transaction into SMP PIQ **96**. If a coherent transaction to an LPA address is detected by transaction filter **98**, then the corresponding coherency state from MTAG **68** is examined. In accordance with the coherency state, transaction filter **98** may assert ignore signal **70** and may queue a coherency transaction in SMP in queue **94**. Ignore signal **70** is asserted and a coherency transaction queued if MTAG **68** indicates that insufficient access rights to the coherency unit for performing the coherent transaction is maintained by SMP node **12A**. Conversely, ignore signal **70** is deasserted and a coherency transaction is not generated if MTAG **68** indicates that a sufficient access right is maintained by SMP node **12A**.

Transactions from SMP in queue **94** and SMP PIQ **96** are processed by a request agent **100** within system interface **24**. Prior to action by request agent **100**, LPA2GA translation unit **82** translates the address of the transaction (if it is an LPA address) from the local physical address presented upon SMP address bus **58** into the corresponding global address. Request agent **100** then generates a header packet specifying a particular coherency request to be transmitted to the home node identified by the global address. The coherency request is placed into output header queue **86**. Subsequently, a coherency reply is received into input header queue **84**. Request agent **100** processes the coherency replies from input header queue **84**, potentially generating reissue transactions for SMP out queue **92** (as described below).

Also included in system interface **24** is a home agent **102** and a slave agent **104**. Home agent **102** processes coherency requests received from input header queue **84**. From the coherency information stored in directory **66** with respect to a particular global address, home agent **102** determines if a coherency demand is to be transmitted to one or more slave agents in other SMP nodes **12**. In one embodiment, home agent **102** blocks the coherency information corresponding to the affected coherency unit. In other words, subsequent requests involving the coherency unit are not performed until the coherency activity corresponding to the coherency request is completed. According to one embodiment, home agent **102** receives a coherency completion from the request agent which initiated the coherency request (via input header queue **84**). The coherency completion indicates that the coherency activity has completed. Upon receipt of the coherency completion, home agent **102** removes the block upon the coherency information corresponding to the affected coherency unit. It is noted that, since the coherency information is blocked until completion of the coherency activity, home agent **102** may update the coherency information in accordance with the coherency activity performed immediately when the coherency request is received.

Slave agent **104** receives coherency demands from home agents of other SMP nodes **12** via input header queue **84**. In response to a particular coherency demand, slave agent **104** may queue a coherency transaction in SMP out queue **92**. In one embodiment, the coherency transaction may cause caches **18** and caches internal to processors **16** to invalidate the affected coherency unit. If the coherency unit is modified in the caches, the modified data is transferred to system interface **24**. Alternatively, the coherency transaction may cause caches **18** and caches internal to processors **16** to change the coherency state of the coherency unit to shared. Once slave agent **104** has completed activity in response to a coherency demand, slave agent **104** transmits a coherency reply to the request agent which initiated the coherency request corresponding to the coherency demand. The coherency reply is queued in output header queue **86**. Prior to performing activities in response to a coherency demand, the global address received with the coherency demand is translated to a local physical address via GA2LPA translation unit **80**.

According to one embodiment, the coherency protocol enforced by request agents **100**, home agents **102**, and slave agents **104** includes a write invalidate policy. In other words, when a processor **16** within an SMP node **12** updates a coherency unit, any copies of the coherency unit stored within other SMP nodes **12** are invalidated. However, other write policies may be used in other embodiments. For example, a write update policy may be employed. According to a write update policy, when an coherency unit is updated the updated data is transmitted to each of the copies of the coherency unit stored in each of the SMP nodes **12**.

Turning next to FIG. **4**, a diagram depicting typical coherency activity performed between the request agent **100** of a first SMP node **12A–12D** (the "requesting node"), the home agent **102** of a second SMP node **12A–12D** (the "home node"), and the slave agent **104** of a third SMP node **12A–12D** (the "slave node") in response to a particular transaction upon the SMP bus **20** within the SMP node **12** corresponding to request agent **100** is shown. Specific coherency activities employed according to one embodiment of computer system **10** as shown in FIG. **1** are further described below with respect to FIGS. **9–13**. Reference numbers **100**, **102**, and **104** are used to identify request agents, home agents, and slave agents throughout the remainder of this description. It is understood that, when an agent communicates with another agent, the two agents often reside in different SMP nodes **12A–12D**.

Upon receipt of a transaction from SMP bus **20**, request agent **100** forms a coherency request appropriate for the transaction and transmits the coherency request to the home node corresponding to the address of the transaction (reference number **110**). The coherency request indicates the access right requested by request agent **100**, as well as the global address of the affected coherency unit. The access right requested is sufficient for allowing occurrence of the transaction being attempted in the SMP node **12** corresponding to request agent **100**.

Upon receipt of the coherency request, home agent **102** accesses the associated directory **66** and determines which SMP nodes **12** are storing copies of the affected coherency unit. Additionally, home agent **102** determines the owner of the coherency unit. Home agent **102** may generate a coherency demand to the slave agents **104** of each of the nodes storing copies of the affected coherency unit, as well as to the slave agent **104** of the node which has the owned coherency state for the affected coherency unit (reference number **112**). The coherency demands indicate the new coherency state for the affected coherency unit in the receiving SMP nodes **12**. While the coherency request is outstanding, home agent **102** blocks the coherency information corresponding to the affected coherency unit such that subsequent coherency requests involving the affected coherency unit are not initiated by the home agent **102**. Home agent **102** additionally updates the coherency information to reflect completion of the coherency request.

Home agent **102** may additionally transmit a coherency reply to request agent **100** (reference number **114**). The coherency reply may indicate the number of coherency replies which are forthcoming from slave agents **104**. Alternatively, certain transactions may be completed without interaction with slave agents **104**. For example, an I/O transaction targeting an I/O interface **26** in the SMP node **12** containing home agent **102** may be completed by home agent **102**. Home agent **102** may queue a transaction for the associated SMP bus **20** (reference number **116**), and then transmit a reply indicating that the transaction is complete.

A slave agent **104**, in response to a coherency demand from home agent **102**, may queue a transaction for presentation upon the associated SMP bus **20** (reference number **118**). Additionally, slave agents **104** transmit a coherency reply to request agent **100** (reference number **120**). The coherency reply indicates that the coherency demand received in response to a particular coherency request has been completed by that slave. The coherency reply is transmitted by slave agents **104** when the coherency demand has been completed, or at such time prior to completion of the coherency demand at which the coherency demand is guaranteed to be completed upon the corresponding SMP

node **12** and at which no state changes to the affected coherency unit will be performed prior to completion of the coherency demand.

When request agent **100** has received a coherency reply from each of the affected slave agents **104**, request agent **100** transmits a coherency completion to home agent **102** (reference number **122**). Upon receipt of the coherency completion, home agent **102** removes the block from the corresponding coherency information. Request agent **100** may queue a reissue transaction for performance upon SMP bus **20** to complete the transaction within the SMP node **12** (reference number **124**).

It is noted that each coherency request is assigned a unique tag by the request agent **100** which issues the coherency request. Subsequent coherency demands, coherency replies, and coherency completions include the tag. In this manner, coherency activity regarding a particular coherency request may be identified by each of the involved agents. It is further noted that non-coherent operations may be performed in response to non-coherent transactions (e.g. I/O transactions). Non-coherent operations may involve only the requesting node and the home node. Still further, a different unique tag may be assigned to each coherency request by the home agent **102**. The different tag identifies the home agent **102**, and is used for the coherency completion in lieu of the requestor tag.

Turning now to FIG. **5**, a diagram depicting coherency activity for an exemplary embodiment of computer system **10** in response to a read to own transaction upon SMP bus **20** is shown. A read to own transaction is performed when a cache miss is detected for a particular datum requested by a processor **16** and the processor **16** requests write permission to the coherency unit. A store cache miss may generate a read to own transaction, for example.

A request agent **100**, home agent **102**, and several slave agents **104** are shown in FIG. **5**. The node receiving the read to own transaction from SMP bus **20** stores the affected coherency unit in the invalid state (e.g. the coherency unit is not stored in the node). The subscript "i" in request node **100** indicates the invalid state. The home node stores the coherency unit in the shared state, and nodes corresponding to several slave agents **104** store the coherency unit in the shared state as well. The subscript "s" in home agent **102** and slave agents **104** is indicative of the shared state at those nodes. The read to own operation causes transfer of the requested coherency unit to the requesting node. The requesting node receives the coherency unit in the modified state.

Upon receipt of the read to own transaction from SMP bus **20**, request agent **100** transmits a read to own coherency request to the home node of the coherency unit (reference number **130**). The home agent **102** in the receiving home node detects the shared state for one or more other nodes. Since the slave agents are each in the shared state, not the owned state, the home node may supply the requested data directly. Home agent **102** transmits a data coherency reply to request agent **100**, including the data corresponding to the requested coherency unit (reference number **132**). Additionally, the data coherency reply indicates the number of acknowledgments which are to be received from slave agents of other nodes prior to request agent **100** taking ownership of the data. Home agent **102** updates directory **66** to indicate that the requesting SMP node **12A–12D** is the owner of the coherency unit, and that each of the other SMP nodes **12A–12D** is invalid. When the coherency information regarding the coherency unit is unblocked upon receipt of a coherency completion from request agent **100**, directory **66** matches the state of the coherency unit at each SMP node **12**.

Home agent **102** transmits invalidate coherency demands to each of the slave agents **104** which are maintaining shared copies of the affected coherency unit (reference numbers **134A**, **134B**, and **134C**). The invalidate coherency demand causes the receiving slave agent to invalidate the corresponding coherency unit within the node, and to send an acknowledge coherency reply to the requesting node indicating completion of the invalidation. Each slave agent **104** completes invalidation of the coherency unit and subsequently transmits an acknowledge coherency reply (reference numbers **136A**, **136B**, and **136C**). In one embodiment, each of the acknowledge replies includes a count of the total number of replies to be received by request agent **100** with respect to the coherency unit.

Subsequent to receiving each of the acknowledge coherency replies from slave agents **104** and the data coherency reply from home agent **102**, request agent **100** transmits a coherency completion to home agent **102** (reference number **138**). Request agent **100** validates the coherency unit within its local memory, and home agent **102** releases the block upon the corresponding coherency information. It is noted that data coherency reply **132** and acknowledge coherency replies **136** may be received in any order depending upon the number of outstanding transactions within each node, among other things.

Turning now to FIG. **6**, a flowchart **140** depicting an exemplary state machine for use by request agents **100** is shown. Request agents **100** may include multiple independent copies of the state machine represented by flowchart **140**, such that multiple requests may be concurrently processed.

Upon receipt of a transaction from SMP in queue **94**, request agent **100** enters a request ready state **142**. In request ready state **142**, request agent **100** transmits a coherency request to the home agent **102** residing in the home node identified by the global address of the affected coherency unit. Upon transmission of the coherency request, request agent **100** transitions to a request active state **144**. During request active state **144**, request agent **100** receives coherency replies from slave agents **104** (and optionally from home agent **102**). When each of the coherency replies has been received, request agent **100** transitions to a new state depending upon the type of transaction which initiated the coherency activity. Additionally, request active state **142** may employ a timer for detecting that coherency replies have not be received within a predefined time-out period. If the timer expires prior to the receipt of the number of replies specified by home agent **102**, then request agent **100** transitions to an error state (not shown). Still further, certain embodiments may employ a reply indicating that a read transfer failed. If such a reply is received, request agent **100** transitions to request ready state **142** to reattempt the read.

If replies are received without error or time-out, then the state transitioned to by request agent **100** for read transactions is read complete state **146**. It is noted that, for read transactions, one of the received replies may include the data corresponding to the requested coherency unit. Request agent **100** reissues the read transaction upon SMP bus **20** and further transmits the coherency completion to home agent **102**. Subsequently, request agent **100** transitions to an idle state **148**. A new transaction may then be serviced by request agent **100** using the state machine depicted in FIG. **6**.

Conversely, write active state **150** and ignored write reissue state **152** are used for write transactions. Ignore

signal **70** is not asserted for certain write transactions in computer system **10**, even when coherency activity is initiated upon network **14**. For example, I/O write transactions are not ignored. The write data is transferred to system interface **24**, and is stored therein. Write active state **150** is employed for non-ignored write transactions, to allow for transfer of data to system interface **24** if the coherency replies are received prior to the data phase of the write transaction upon SMP bus **20**. Once the corresponding data has been received, request agent **100** transitions to write complete state **154**. During write complete state **154**, the coherency completion reply is transmitted to home agent **102**. Subsequently, request agent **100** transitions to idle state **148**.

Ignored write transactions are handled via a transition to ignored write reissue state **152**. During ignored write reissue state **152**, request agent **100** reissues the ignored write transaction upon SMP bus **20**. In this manner, the write data may be transferred from the originating processor **16** and the corresponding write transaction released by processor **16**. Depending upon whether or not the write data is to be transmitted with the coherency completion, request agent **100** transitions to either the ignored write active state **156** or the ignored write complete state **158**. Ignored write active state **156**, similar to write active state **150**, is used to await data transfer from SMP bus **20**. During ignored write complete state **158**, the coherency completion is transmitted to home agent **102**. Subsequently, request agent **100** transitions to idle state **148**. From idle state **148**, request agent **100** transitions to request ready state **142** upon receipt of a transaction from SMP in queue **94**.

Turning next to FIG. **7**, a flowchart **160** depicting an exemplary state machine for home agent **102** is shown. Home agents **102** may include multiple independent copies of the state machine represented by flowchart **160** in order to allow for processing of multiple outstanding requests to the home agent **102**. However, the multiple outstanding requests do not affect the same coherency unit, according to one embodiment.

Home agent **102** receives coherency requests in a receive request state **162**. The request may be classified as either a coherent request or an other transaction request. Other transaction requests may include I/O read and I/O write requests, interrupt requests, and administrative requests, according to one embodiment. The non-coherent requests are handled by transmitting a transaction upon SMP bus **20**, during a state **164**. A coherency completion is subsequently transmitted. Upon receiving the coherency completion, I/O write and accepted interrupt transactions result in transmission of a data transaction upon SMP bus **20** in the home node (i.e. data only state **165**). When the data has been transferred, home agent **102** transitions to idle state **166**. Alternatively, I/O read, administrative, and rejected interrupted transactions cause a transition to idle state **166** upon receipt of the coherency completion.

Conversely, home agent **102** transitions to a check state **168** upon receipt of a coherent request. Check state **168** is used to detect if coherency activity is in progress for the coherency unit affected by the coherency request. If the coherency activity is in progress (i.e. the coherency information is blocked), then home agent **102** remains in check state **168** until the in-progress coherency activity completes. Home agent **102** subsequently transitions to a set state **170**.

During set state **170**, home agent **102** sets the status of the directory entry storing the coherency information corresponding to the affected coherency unit to blocked. The blocked status prevents subsequent activity to the affected coherency unit from proceeding, simplifying the coherency protocol of computer system **10**. Depending upon the read or write nature of the transaction corresponding to the received coherency request, home agent **102** transitions to read state **172** or write reply state **174**.

While in read state **172**, home agent **102** issues coherency demands to slave agents **104** which are to be updated with respect to the read transaction. Home agent **102** remains in read state **172** until a coherency completion is received from request agent **100**, after which home agent **102** transitions to clear block status state **176**. In embodiments in which a coherency request for a read may fail, home agent **102** restores the state of the affected directory entry to the state prior to the coherency request upon receipt of a coherency completion indicating failure of the read transaction.

During write state **174**, home agent **102** transmits a coherency reply to request agent **100**. Home agent **102** remains in write reply state **174** until a coherency completion is received from request agent **100**. If data is received with the coherency completion, home agent **102** transitions to write data state **178**. Alternatively, home agent **102** transitions to clear block status state **176** upon receipt of a coherency completion not containing data.

Home agent **102** issues a write transaction upon SMP bus **20** during write data state **178** in order to transfer the received write data. For example, a write stream operation (described below) results in a data transfer of data to home agent **102**. Home agent **102** transmits the received data to memory **22** for storage. Subsequently, home agent **102** transitions to clear blocked status state **176**.

Home agent **102** clears the blocked status of the coherency information corresponding to the coherency unit affected by the received coherency request in clear block status state **176**. The coherency information may be subsequently accessed. The state found within the unblocked coherency information reflects the coherency activity initiated by the previously received coherency request. After clearing the block status of the corresponding coherency information, home agent **102** transitions to idle state **166**. From idle state **166**, home agent **102** transitions to receive request state **162** upon receipt of a coherency request.

Turning now to FIG. **8**, a flowchart **180** is shown depicting an exemplary state machine for slave agents **104**. Slave agent **104** receives coherency demands during a receive state **182**. In response to a coherency demand, slave agent **104** may queue a transaction for presentation upon SMP bus **20**. The transaction causes a state change in caches **18** and caches internal to processors **16** in accordance with the received coherency demand. Slave agent **104** queues the transaction during send request state **184**.

During send reply state **186**, slave agent **104** transmits a coherency reply to the request agent **100** which initiated the transaction. It is noted that, according to various embodiments, slave agent **104** may transition from send request state **184** to send reply state **186** upon queuing the transaction for SMP bus **20** or upon successful completion of the transaction upon SMP bus **20**. Subsequent to coherency reply transmittal, slave agent **104** transitions to an idle state **188**. From idle state **188**, slave agent **104** may transition to receive state **182** upon receipt of a coherency demand.

Turning now to FIGS. **9–12**, several tables are shown listing exemplary coherency request types, coherency demand types, coherency reply types, and coherency completion types. The types shown in the tables of FIGS.

9–12 may be employed by one embodiment of computer system 10. Other embodiments may employ other sets of types.

FIG. 9 is a table 190 listing the types of coherency requests. A first column 192 lists a code for each request type, which is used in FIG. 13 below. A second column 194 lists the coherency requests types, and a third column 196 indicates the originator of the coherency request. Similar columns are used in FIGS. 10–12 for coherency demands, coherency replies, and coherency completions. An "R" indicates request agent 100; an "S" indicates slave agent 104; and an "H" indicates home agent 102.

A read to share request is performed when a coherency unit is not present in a particular SMP node and the nature of the transaction from SMP bus 20 to the coherency unit indicates that read access to the coherency unit is desired. For example, a cacheable read transaction may result in a read to share request. Generally speaking, a read to share request is a request for a copy of the coherency unit in the shared state. Similarly, a read to own request is a request for a copy of the coherency unit in the owned state. Copies of the coherency unit in other SMP nodes should be changed to the invalid state. A read to own request may be performed in response to a cache miss of a cacheable write transaction, for example.

Read stream and write stream are requests to read or write an entire coherency unit. These operations are typically used for block copy operations. Processors 16 and caches 18 do not cache data provided in response to a read stream or write stream request. Instead, the coherency unit is provided as data to the processor 16 in the case of a read stream request, or the data is written to the memory 22 in the case of a write stream request. It is noted that read to share, read to own, and read stream requests may be performed as COMA operations (e.g. RTS, RTO, and RS) or as NUMA operations (e.g. RTSN, RTON, and RSN).

A write back request is performed when a coherency unit is to be written to the home node of the coherency unit. The home node replies with permission to write the coherency unit back. The coherency unit is then passed to the home node with the coherency completion.

The invalidate request is performed to cause copies of a coherency unit in other SMP nodes to be invalidated. An exemplary case in which the invalidate request is generated is a write stream transaction to a shared or owned coherency unit. The write stream transaction updates the coherency unit, and therefore copies of the coherency unit in other SMP nodes are invalidated.

I/O read and write requests are transmitted in response to I/O read and write transactions. I/O transactions are non-coherent (i.e. the transactions are not cached and coherency is not maintained for the transactions). I/O block transactions transfer a larger portion of data than normal I/O transactions. In one embodiment, sixty-four bytes of information are transferred in a block I/O operation while eight bytes are transferred in a non-block I/O transaction.

Flush requests cause copies of the coherency unit to be invalidated. Modified copies are returned to the home node. Interrupt requests are used to signal interrupts to a particular device in a remote SMP node. The interrupt may be presented to a particular processor 16, which may execute an interrupt service routine stored at a predefined address in response to the interrupt. Administrative packets are used to send certain types of reset signals between the nodes.

FIG. 10 is a table 198 listing exemplary coherency demand types. Similar to table 190, columns 192, 194, and 196 are included in table 198. A read to share demand is conveyed to the owner of a coherency unit, causing the owner to transmit data to the requesting node. Similarly, read to own and read stream demands cause the owner of the coherency unit to transmit data to the requesting node. Additionally, a read to own demand causes the owner to change the state of the coherency unit in the owner node to invalid. Read stream and read to share demands cause a state change to owned (from modified) in the owner node.

Invalidate demands do not cause the transfer of the corresponding coherency unit. Instead, an invalidate demand causes copies of the coherency unit to be invalidated. Finally, administrative demands are conveyed in response to administrative requests. It is noted that each of the demands are initiated by home agent 102, in response to a request from request agent 100.

FIG. 11 is a table 200 listing exemplary reply types employed by one embodiment of computer system 10. Similar to FIGS. 9 and 10, FIG. 11 includes columns 192, 194, and 196 for the coherency replies.

A data reply is a reply including the requested data. The owner slave agent typically provides the data reply for coherency requests. However, home agents may provide data for I/O read requests.

The acknowledge reply indicates that a coherency demand associated with a particular coherency request is completed. Slave agents typically provide acknowledge replies, but home agents provide acknowledge replies (along with data) when the home node is the owner of the coherency unit.

Slave not owned, address not mapped and error replies are conveyed by slave agent 104 when an error is detected. The slave not owned reply is sent if a slave is identified by home agent 102 as the owner of a coherency unit and the slave no longer owns the coherency unit. The address not mapped reply is sent if the slave receives a demand for which no device upon the corresponding SMP bus 20 claims ownership. Other error conditions detected by the slave agent are indicated via the error reply.

In addition to the error replies available to slave agent 104, home agent 102 may provide error replies. The negative acknowledge (NACK) and negative response (NOPE) are used by home agent 102 to indicate that the corresponding request is does not require service by home agent 102. The NACK transaction may be used to indicate that the corresponding request is rejected by the home node. For example, an interrupt request receives a NACK if the interrupt is rejected by the receiving node. An acknowledge (ACK) is conveyed if the interrupt is accepted by the receiving node. The NOPE transaction is used to indicate that a corresponding flush request was conveyed for a coherency unit which is not stored by the requesting node.

FIG. 12 is a table 202 depicting exemplary coherency completion types according to one embodiment of computer system 10. Similar to FIGS. 9–11, FIG. 12 includes columns 192, 194, and 196 for coherency completions.

A completion without data is used as a signal from request agent 100 to home agent 102 that a particular request is complete. In response, home agent 102 unblocks the corresponding coherency information. Two types of data completions are included, corresponding to dissimilar transactions upon SMP bus 20. One type of reissue transaction involves only a data phase upon SMP bus 20. This reissue transaction may be used for I/O write and interrupt transactions, in one embodiment. The other type of reissue transaction involves both an address and data phase. Coherent writes, such as

write stream and write back, may employ the reissue transaction including both address and data phases. Finally, a completion indicating failure is included for read requests which fail to acquire the requested state.

Turning next to FIG. **13**, a table **210** is shown depicting coherency activity in response to various transactions upon SMP bus **20**. Table **210** depicts transactions which result in requests being transmitted to other SMP nodes **12**. Transactions which complete within an SMP node are not shown. A "-" in a column indicates that no activity is performed with respect to that column in the case considered within a particular row. A transaction column **212** is included indicating the transaction received upon SMP bus **20** by request agent **100**. MTAG column **214** indicates the state of the MTAG for the coherency unit accessed by the address corresponding to the transaction. The states shown include the MOSI states described above, and an "n" state. The "n" state indicates that the coherency unit is accessed in NUMA mode for the SMP node in which the transaction is initiated. Therefore, no local copy of the coherency unit is stored in the requesting nodes memory. Instead, the coherency unit is transferred from the home SMP node (or an owner node) and is transmitted to the requesting processor **16** or cache **18** without storage in memory **22**.

A request column **216** lists the coherency request transmitted to the home agent identified by the address of the transaction. Upon receipt of the coherency request listed in column **216**, home agent **102** checks the state of the coherency unit for the requesting node as recorded in directory **66**. D column **218** lists the current state of the coherency unit recorded for the requesting node, and D' column **220** lists the state of the coherency unit recorded for the requesting node as updated by home agent **102** in response to the received coherency request. Additionally, home agent **102** may generate a first coherency demand to the owner of the coherency unit and additional coherency demands to any nodes maintaining shared copies of the coherency unit. The coherency demand transmitted to the owner is shown in column **222**, while the coherency demand transmitted to the sharing nodes is shown in column **224**. Still further, home agent **102** may transmit a coherency reply to the requesting node. Home agent replies are shown in column **226**.

The slave agent **104** in the SMP node indicated as the owner of the coherency unit transmits a coherency reply as shown in column **228**. Slave agents **104** in nodes indicated as sharing nodes respond to the coherency demands shown in column **224** with the coherency replies shown in column **230**, subsequent to performing state changes indicated by the received coherency demand.

Upon receipt of the appropriate number of coherency replies, request agent **100** transmits a coherency completion to home agent **102**. The coherency completions used for various transactions are shown in column **232**.

As an example, a row **234** depicts the coherency activity in response to a read to share transaction upon SMP bus **20** for which the corresponding MTAG state is invalid. The corresponding request agent **100** transmits a read to share coherency request to the home node identified by the global address associated with the read to share transaction. For the case shown in row **234**, the directory of the home node indicates that the requesting node is storing the data in the invalid state. The state in the directory of the home node for the requesting node is updated to shared, and read to share coherency demand is transmitted by home agent **102** to the node indicated by the directory to be the owner. No demands are transmitted to sharers, since the transaction seeks to acquire the shared state. The slave agent **104** in the owner node transmits the data corresponding to the coherency unit to the requesting node. Upon receipt of the data, the request agent **100** within the requesting node transmits a coherency completion to the home agent **102** within the home node. The transaction is therefore complete.

It is noted that the state shown in D column **218** may not match the state in MTAG column **214**. For example, a row **236** shows a coherency unit in the invalid state in MTAG column **214**. However, the corresponding state in D column **218** may be modified, owned, or shared. Such situations occur when a prior coherency request from the requesting node for the coherency unit is outstanding within computer system **10** when the access to MTAG **68** for the current transaction to the coherency unit is performed upon address bus **58**. However, due to the blocking of directory entries during a particular access, the outstanding request is completed prior to access of directory **66** by the current request. For this reason, the generated coherency demands are dependent upon the directory state (which matches the MTAG state at the time the directory is accessed). For the example shown in row **236**, since the directory indicates that the coherency unit now resides in the requesting node, the read to share request may be completed by simply reissuing the read transaction upon SMP bus **20** in the requesting node. Therefore, the home node acknowledges the request, including a reply count of one, and the requesting node may subsequently reissue the read transaction. It is further noted that, although table **210** lists many types of transactions, additional transactions may be employed according to various embodiments of computer system **10**.

Fast Write Stream Operations

Turning now to FIG. **14**, a diagram depicting a local physical address space **300** in accordance with one embodiment of computer system **10** is shown. Generally speaking, an address space identifies a storage location corresponding to each of the possible addresses within the address space. The address space may assign additional properties to certain addresses within the address space. In one embodiment, addresses within local physical address space **300** include 41 bits.

As shown in FIG. **14**, local physical address space **300** includes an LPA region **302** and an LPA_{fw} region **304**. LPA region **302** allows read and write transactions to occur to the corresponding storage locations once a coherency state is acquired consistent with the transaction. In other words, no additional properties are assigned to addresses within LPA region **302**. In one embodiment, LPA region **302** is the set of addresses within address space **300** having most significant bits (MSBs) equal to 0xx00 (represented in binary). The "xx" portion of the MSBs identifies the SMP node **12** which serves as the home node for the address. For example, xx=00 may identify SMP node **12**A; xx=01 may identify SMP node **12**B, etc. The address is a local physical address within LPA region **302** if the "xx" portion identifies the SMP node **12** containing the processor **16** which performs the transaction corresponding to the address. Otherwise, the address is a global address. Additionally, the global address is a local physical address within another SMP node **12**.

Addresses within LPA_{fw} region **304** refer to the same set of storage locations to which addresses within LPA region **302** refer. For example, an address "A" within LPA region **302** may refer to a storage location **306** storing a datum "B". The address "A" within LPA_{fw} region **304** also refers to storage location **306** storing datum "B". For this example, address "A" refers to the bits of the address exclusive of the

bits identifying LPA_{fw} region **304** and LPA region **302** (e.g. the least significant 36 bits, in one embodiment). In one embodiment, LPA_{fw} region **304** is the set of addresses having MSBs equal to 0xx10 (represented in binary). The "xx" field is interpreted as described above. It is noted that having two or more regions of addresses within an address space identifying the same set of storage locations is referred to as aliasing.

In contrast to the transactions permitted to LPA region **302**, read transactions are not permitted to LPA_{fw} region **304**. Write transactions are permitted to LPA_{fw} region **304**. In one particular embodiment, write stream transactions are permitted to LPA_{fw} region **304** while other write transactions are not permitted.

System interface **24** recognizes the write operation to LPA_{fw} region **304** as a "fast write" write operation. Instead of first acquiring a coherency state for the affected coherency unit consistent with performing a write operation and then subsequently transferring the data from the initiating processor, system interface **24** allows transfer of the data to system interface **24** prior to completing the requisite coherency operation. In other words, system interface **24** does not assert the ignore signal **70** for write operations having an address in LPA_{fw} region **304** due to a lack of proper coherency state to perform a write. The write operation to the LPA_{fw} address region may thereby appear to the issuing processor **16** to complete before the obtaining of the write permission by SMP node **12** has been globally ordered. Processor resources are freed more rapidly than if the coherency state is acquired prior to receiving the data from the processor.

Addresses within LPA_{fw} region **304** are therefore assigned the additional property that write operations performed to LPA_{fw} region **304** are performed using a fast write protocol. Write operations using the fast write protocol may be completed out of order with respect to the other operations performed within the local SMP node **12**. It is noted that other combinations of the MSBs within LPA address space **300** may be used to assign other additional properties.

Generally speaking, a "fast write" write operation may be completed out of order with respect to the surrounding operations. Still further, the "fast write" write operation is effectively completed outside of the global ordering of computer system **10** since the operation is completed in the local node prior to acquiring a coherency state consistent with performing a write operation. Therefore, the order generally applied to transactions upon SMP bus **20** is overridden via the fast write protocol. Although in the embodiment described certain bits of the address of a "fast write" write operation form the specific encoding identifying the "fast write" write operation, other formats of the "fast write" write operation are contemplated. For example, control signals upon address bus **58** (shown in FIG. **2**) identify the type of transaction being presented upon address bus **58**. Additional encodings of the control signals may be defined to indicate that a "fast write" write transaction is being performed instead of using MSBs of the address presented. Still further, instead of using a write stream instruction to perform fast writes, a new instruction may be defined. The new instruction expressly indicates that a "fast write" write operation is to be performed. Processor **16** may be designed to perform the fast write instruction by presenting a "fast write" write transaction upon address bus **58**.

Turning now to FIG. **15**, a flow chart **310** depicting processing of transactions received by system interface **24** is shown according to one embodiment of system interface **24**. When a transaction is detected, system interface **24** determines if the transaction is a read or write transaction (decision box **312**). If a read transaction is detected, then read processing is performed by system interface **24** in accordance with FIG. **13** (step **314**). Alternatively, when a write transaction is detected, system interface **24** determines if a write stream transaction having an address within LPA_{fw} region **304** is conveyed (decision box **316**). In other words, system interface **24** determines if a write operation having a fast write encoding is performed. If a non-fast write transaction is detected, system interface **24** processes the write operation as described with respect to FIG. **13** (step **318**). If a write stream transaction to LPA_{fw} region **304** is detected, steps **320**, **322**, and **324** are performed.

A fast write transaction may be performed in either NUMA mode (when the "xx" field specifies an SMP node **12A–12D** other than the SMP node **12A–12D** in which the fast write transaction is generated) or in COMA mode. As mentioned above, NUMA mode is selected by coding the global address into MMUs **76** while COMA mode is selected by coding a local physical address into MMUs **76**. Fast write transactions may be particularly beneficial for NUMA mode, where no MTAG is present in system interface **24**. Because no MTAG is present, the access rights of the node to the affected coherency unit cannot be determined within the node. Therefore, coherency activity is performed for a write transaction in NUMA mode even if no other node is maintaining a copy of the affected coherency unit. Fast write transactions allow this coherency activity to occur concurrent with transfer of the data from the initiating processor, thereby freeing local node resources more quickly than if the same NUMA write transaction were performed using a non-fast write encoding.

As shown in step **320**, system interface **24** queues the fast write operation within system interface **24**. In one embodiment, the fast write operation is queued in SMP in queue **94** as shown in FIG. **3**. The ignore signal **70** is not asserted upon address bus **58**, regardless of the state of the affected coherency unit within MTAG **68**. Conversely, a non-fast write operation affecting a coherency unit for which MTAG **68** is storing the invalid, shared, or owned state receives an asserted ignore signal **70**. After acquiring write access to the coherency unit, system interface **24** reissues the non-fast write operation and the operation may complete at that time.

Since ignore signal **70** is not asserted upon the fast write transaction, the corresponding data is subsequently provided by processor **16** upon data bus **60** (shown in FIG. **2**). During step **322**, the data is received and stored by system interface **24**. The write operation is thereby complete with respect to the initiating processor **16**.

Step **324** indicates that coherency operations are performed to process the write operation at the global level. It is noted that step **324** may be initiated upon receipt of the write operation. Therefore, steps **322** and **324** may be performed in parallel.

Turning now to FIG. **16**, a block diagram of a portion of one embodiment of computer system **10** is shown to further illustrate performance of write operations using the fast write protocol in computer system **10**. FIG. **16** depicts processors **16A** and **16B**, although additional processors **16** may be included. Processors **16** include respective write stream buffers **330** (such as write stream buffer **330A** within processor **16A** and write stream buffer **330B** within processor **16B**). External caches **18** are shown coupled between processors **16** and SMP bus **20**. However, external caches **18**

are bypassed by write stream operations. Therefore external caches **18** are shown as dashed elements. Additionally, system interface **24** is shown coupled to SMP bus **20**. Within system interface **24**, SMP in queue **94** and request agent **100** are shown.

Write stream buffers **330** are included in processors **16** for storing write stream operations prior to their completion upon SMP bus **20**. The address to be written by the write stream operation may be stored, as well as the corresponding data. When the address has been presented upon SMP bus **20** and the corresponding data has been transferred, the write stream buffer **330** is available for storing a subsequent write stream operation. Typically, processors **16** are configured to support a small number of outstanding write stream operations. For example, one write stream buffer **330** may be included in each processor **16**. Therefore, if multiple write stream operations are to be performed within a relatively short period of time, processor **16** may stall instruction execution until the write stream operations are stored into write stream buffers **330**.

Even in embodiments of computer system **10** including address controller **52** and data controller **54**, a similar problem exists. Storage locations within address controller **52** and data controller **54** are allocated to the write stream operation, and these storage locations are not freed until the write stream operation is completed upon SMP bus **20**. Additionally, if a write stream operation receives an asserted ignore signal from system bus **24** (i.e. it is not a fast write operation), then subsequent transactions from that address controller are also ignored. Therefore, transactions of all types may be impeded by write stream operations which do not use the fast write protocol.

System interface **24**, on the other hand, includes SMP in queue **94**. SMP in queue **94** may be much larger than the buffers included within processors **16**, storing a significantly larger number of transactions. In one embodiment, SMP in queue **94** includes **128** storage locations for transactions. Storage locations within output data queue **90** (shown in FIG. **2**) correspond to storage locations within SMP in queue **94** and store the data corresponding to write operations within SMP in queue **94**. Request agent **100** selects transactions from SMP in queue **94** for which to perform coherency operations, and transmits the coherency operations upon network **14**.

Due to the larger number of storage locations within SMP in queue **94**, a large number of fast write stream operations may be queued therein. Since the fast write stream transactions are completed from processors **16** by storing the transaction into SMP in queue **94** and the corresponding data within output data queue **90**, processors **16** may continue with other operations while system interface **24** completes the write stream operations.

Turning next to FIG. **17**, a diagram depicting coherency activities performed in response to a fast write stream operation is shown according to one embodiment of computer system **10**. A request agent **100**, a home agent **102**, and an owner slave agent **104A**, and a sharing slave agent **104B** are shown in FIG. **18**. Request agent **100**, upon receipt of a write stream transaction having an LPA_{fw} address, transmits a write stream request to the home node identified by the GA translated from the LPA_{fw} address (reference number **340**). Alternatively, the write stream operation may be presented upon SMP bus **20** using a global address identifying fast write protocol via the most significant bits. In one embodiment, the write stream request is conveyed regardless of the coherency state stored in MTAG **68** within the requesting node.

Upon receipt of the write stream request from request agent **100**, a home agent **102** determines the owner and any sharers of the requested coherency unit. The home agent **102** transmits an invalidate demand to the owner slave **104A** and to the sharing slave(s) **104B** (reference numbers **342** and **344**, respectively). In this manner, copies of the coherency unit updated by the write stream operation within any slave nodes are invalidated. The write stream operation updates each byte within the coherency unit. Therefore, the copies maintained by slaves **104** are invalid upon completion of the write stream coherency operation.

Slave agents **104** receive the invalidate demands, and transmit a acknowledge replies to request agent **100** (reference numbers **346** and **348**). Additionally, the slave agents **104** invalidate their copies of the coherency unit.

Upon receipt of the acknowledge replies from each of the slave agents **104**, request agent **100** transmits a coherency completion with data to home agent **102** (reference number **350**). The data transmitted is the data received from the processor **16** which initiated the fast write stream transaction. It is noted that, if a copy of the coherency unit updated by the fast write stream transaction is stored in the memory **22** corresponding to the SMP node **12** including the initiating processor **16**, the copy is invalidated (similar to any other slave copy).

Turning next to FIG. **18**, a timing diagram is shown depicting transactions performed upon SMP bus **20** to perform a write stream operation in one embodiment of computer system **10**. Address bus **58** transactions are shown, as well as data bus **60** transactions.

Upon execution of a write stream instruction, a processor **16** performs a write stream transaction upon address bus **58** (reference number **360**). System interface **24** examines the coherency state of the affected coherency unit (i.e. the coherency unit including address "A") within MTAG **68**. If the SMP node **12** has write permission to the coherency unit (e.g. the modified state), system interface **24** allows the write stream operation to complete. However, if write permission is not stored in MTAG **68**, system interface **24** asserts the ignore signal as shown in FIG. **18** (reference number **362**). System interface **24** proceeds with coherency operations to acquire write permission to the affected coherency unit. A significant amount of time may elapse between the ignoring of write stream transaction **360** and a subsequent reissue of the write stream transaction (reference number **364**). System interface **24** reissues the write stream transaction upon acquiring write permission to the affected coherency unit. Upon detection of the reissue, processor **16** conveys the data corresponding to write stream transaction **360** (reference number **366**) in accordance with the bus protocol of SMP bus **20**. Once the data is transferred, the processor **16** resources employed to store and perform the write stream transaction are freed for use by another transaction. A processor **16** supporting only one outstanding write stream transaction may now initiate a second write stream operation to an address B (reference number **368**).

Conversely, FIG. **19** shows a timing diagram of a fast write stream operation as performed by one embodiment of computer system **10**. Address bus **58** transactions are shown, as well as data bus **60** transactions.

Similar to FIG. **18**, a processor **16** performs a write stream transaction **370** upon address bus **58** upon execution of a write stream instruction. However, the write stream transaction in FIG. **19** is performed using the fast write stream encoding. Regardless of the state of the updated coherency unit in MTAG **68**, system interface **24** does not assert the

ignore signal **70** (reference number **372**). Subsequently, the data corresponding to the fast write stream transaction **370** is transferred upon data bus **60**. The processor **16** resources used to store and perform the fast write stream transaction are freed rapidly, allowing the resources to be used for subsequent transactions such as another write stream operation (reference number **376**). Advantageously, the protocol and traffic upon SMP bus **20** determines the time period for which processor resources are occupied by the fast write stream transaction. Conversely, write stream transactions as shown in FIG. **18** occupy processor resources for a time period determined by the latency of the corresponding coherency operations performed upon network **14**.

Although SMP nodes **12** have been described in the above exemplary embodiments, generally speaking an embodiment of computer system **10** may include one or more processing nodes. As used herein, a processing node includes at least one processor and a corresponding memory. Additionally, circuitry for communicating with other processing nodes is included. When more than one processing node is included in an embodiment of computer system **10**, the corresponding memories within the processing nodes form a distributed shared memory. A processing node may be referred to as remote or local. A processing node is a remote processing node with respect to a particular processor if the processing node does not include the particular processor. Conversely, the processing node which includes the particular processor is that particular processor's local processing node. Still further, the term "coherency operation", as used herein, refers to a combination of coherency requests, coherency demands, coherency replies, and coherency completions employed to acquire a particular coherency state in the processing node within which a transaction is initiated which causes the coherency state to be desired in the processing node.

In accordance with the above disclosure, a computer system has been described which performs efficient write operations. Processor resources are freed upon transmission of the write operation and corresponding data to the system interface, before an appropriate coherency state is acquired by the node containing the processor. The ordering of transactions within the node is not maintained for the write operations, but the operations are cleared from the processor more rapidly. Advantageously, the processor resources are available for use by subsequent transactions while coherency operations are performed in response to the write transactions. Ordinarily, these processor resources would be occupied by the write transaction. As a result, computer system performance may be increased to the extent that the more rapidly freed resources may be used for subsequent transactions during performance of the corresponding coherency operations.

Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. For example, although various blocks and components shown herein have been described in terms of hardware embodiments, alternative embodiments may implement all or a portion of the hardware functionality in software. It is intended that the following claims be interpreted to embrace all such variations and modifications.

What is claimed is:

1. A method for performing write operations in a multiprocessing computer system, comprising:

initiating a write operation by a processor within a local processing node of said multiprocessing computer system;

performing a coherency operation to at least one remote processing node in response to said write operation;

completing said write operation within said local processing node prior to completion of said coherency operation if said write operation includes a specific predefined encoding; and

completing said write operation within said local processing node subsequent to completion of said coherency operation if said write operation includes an encoding different than said specific predefined encoding.

2. The method as recited in claim **1** wherein said specific predefined encoding is provided via an address included with said write operation.

3. The method as recited in claim **2** wherein said address lies within a first address region which is within an address space of said local processing node.

4. The method as recited in claim **3** wherein said first address region is identified by a particular value within a plurality of most significant bits of said address.

5. The method as recited in claim **3** wherein said first address region is an alias for a second address region within said address space.

6. The method as recited in claim **4** wherein said encoding different than said specific predefined encoding comprises a second address within a second address region.

7. The method as recited in claim **3** wherein said write operation is a write stream operation.

8. The method as recited in claim **3** further comprising translating said address to a global address prior to said performing said coherency operation.

9. The method as recited in claim **1** wherein said completing comprises transferring data from said processor.

10. The method as recited in claim **9** further comprising transferring said data to a home node of said address upon completion of said coherency operations.

11. An apparatus for performing write operations in a multiprocessing computer system, comprising:

a processor configured to perform a write operation; and

a system interface coupled to receive said write operation and to perform a coherency operation in response to said write operation, wherein said system interface is configured to complete said write operation with respect to said processor prior to completing said coherency operation if said write operation includes a specific predefined encoding, and wherein said system interface is further configured to inhibit completion of said write operation with respect to said processor until completion of said coherency operation if said write operation includes a different encoding than said specific predefined encoding.

12. The apparatus as recited in claim **11** wherein said coherency operation is performed in order to acquire a coherency state which allows said write operation to occur to a coherency unit identified by said write operation.

13. The apparatus as recited in claim **11** wherein said specific predefined encoding is provided via an address included with said write operation.

14. The apparatus as recited in claim **13** wherein said address lies within a first address region within an address space of accessible to said processor.

15. The apparatus as recited in claim **14** wherein said first address region is an alias to a second address region within said address space, and wherein said different encoding comprises a second address lying within said second address region.

16. The apparatus as recited in claim **11** wherein completing said write operation with respect to said processor

comprises transferring data corresponding to said write operation from said processor.

17. A computer system, comprising:

a first processing node including at least one processor, wherein said processor is configured to perform a write operation, and wherein said first processing node is configured to complete said write operation with respect to said processor prior to acquiring a coherency state allowing said write operation if said write operation includes a predefined encoding; and

a second processing node configured as a home node of a coherency unit affected by said write operation, wherein said second processing node is coupled to receive a coherency request from said first processing node, and wherein said first processing node conveys said coherency request in order to acquire said coherency state.

18. The computer system as recited in claim **17** wherein said predefined encoding comprises an address within an address region of an address space corresponding to said first processing node.

19. The computer system as recited in claim **18** wherein said address region is an alias to a second address region within said address space.

20. The computer system as recited in claim **17** wherein said first processing node provides data corresponding to said write operation to said second processing node upon completion of said coherency request.

* * * * *